HONDA

INSTALLATION INSTRUCTIONS

| Accessory	Application	Publications No.
REMOTE ENGINE STARTER TRANSMITTER	**2015 ODYSSEY**	**VERSION 1**
		Issue Date **JULY 2014**

PARTS LIST

Transmitter

ID label

Transmitter Registration

- Perform remote control transmitter registration first in accordance with the following steps.
- An additional with remote control transmitter can be registered (total two units).

1. Acquire the PCM Code from the Interactive Network.

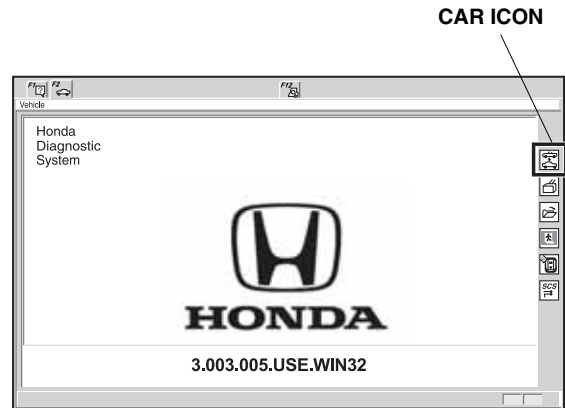**DATA LINK CONNECTOR (The position may be different.)**
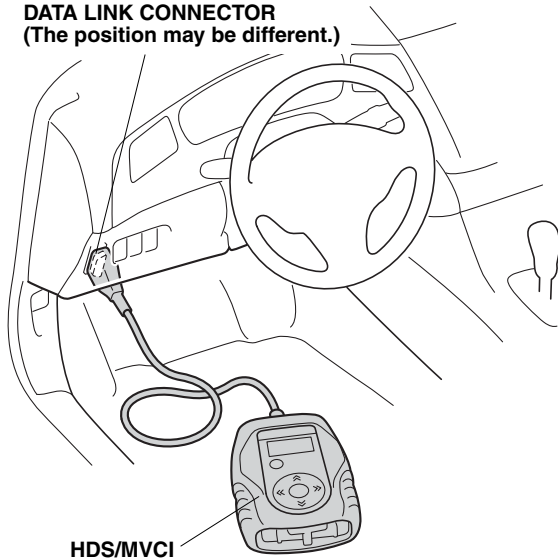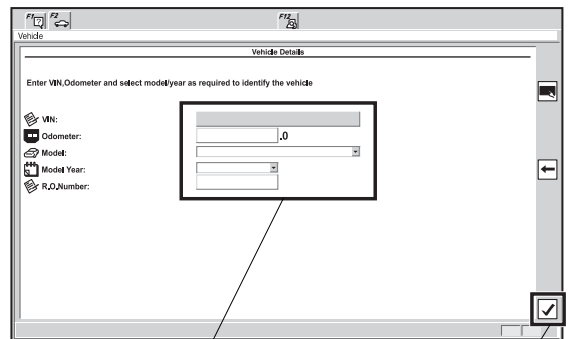
HDS/MVCI

B32201AH

2. Connect the HDS/MVCI to the data link connector, then turn the ignition switch on.

3. Start the Honda Diagnostic System, then click the car icon.

CAR ICON

Honda Diagnostic System

3.003.005.USE.WIN32

B40150AH

4. Input the VIN and other requirements in accordance with the HDS, then click the check button.

Vehicle Details

Enter VIN,Odometer and select model/year as required to identify the vehicle

VIN:
Odometer: .0
Model:
Model Year:
R.O.Number:

Input the VIN and other required information.

CHECK BUTTON

B32102BH

AII 51947 (1407)   08E91-E54-1000-90   **1 of 4**

5. Select the "Honda System," then click the check button.

Select "Honda Systems."

CHECK BUTTON

B32103AH
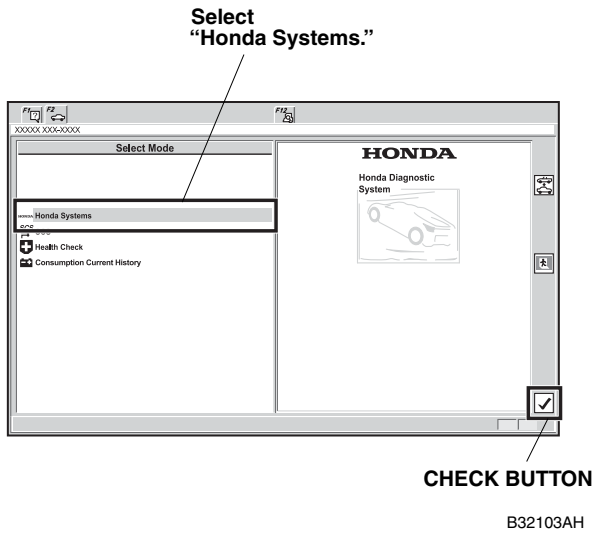
6. Select the "R/C ENGINE STARTER" and click the check button.

Select "R/C ENG STARTER."

CHECK BUTTON

B32104AH
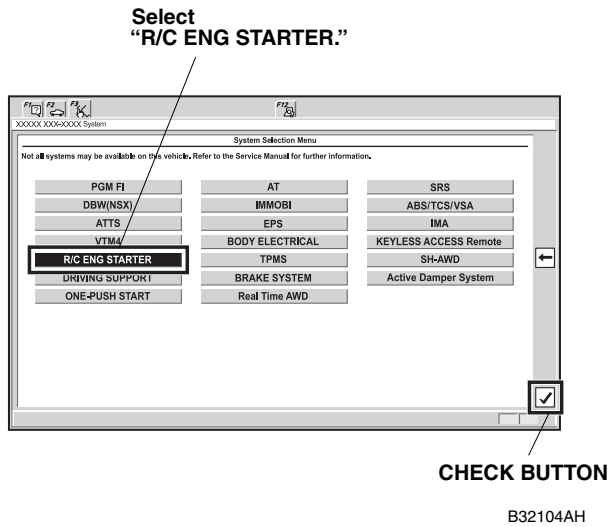
7. Prepare the new transmitter to register.

8. Select the "REGISTER NEW TRANSMITTER," then click the check button.

Select "REGISTER NEW TRANSMITTER"

CHECK BUTTON

B32202AH
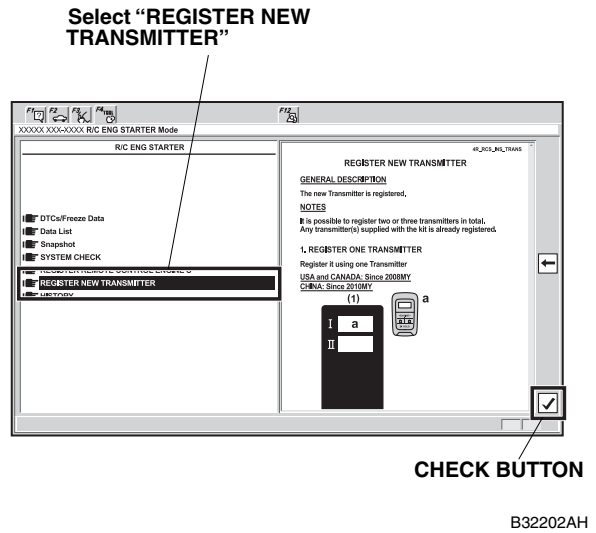
9. The following message will display: "Obtain PCM-code (IMMOBILIZER PCM CODE) from iN. This vehicle's VIN will be required to obtain the password. (USA)" Click the check button.

"Obtain PCM-code" message.

CHECK BUTTON

B32106AH
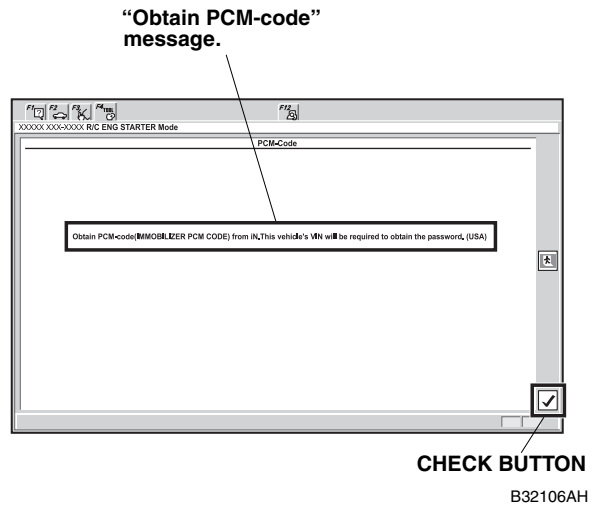
10. Input the PCM code, then click the check button. NOTE: To ensure security, the PCM-code (password) is changed everyday, so it is impossible to register the remote control engine starter if the dates of the PCM-code acquisition and registration are different. The date of the HDS should also be the same.
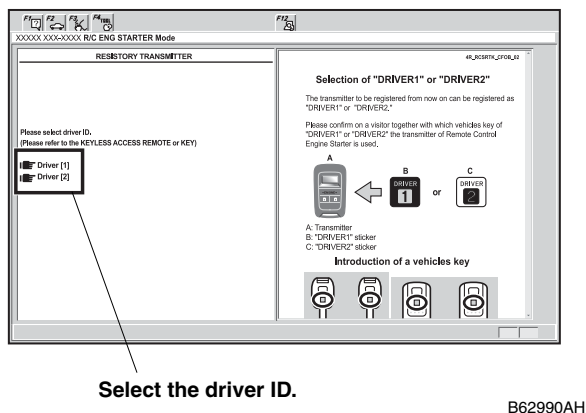
Input the "PCM-Code".

PCM-Code

CHECK BUTTON

B32107BH
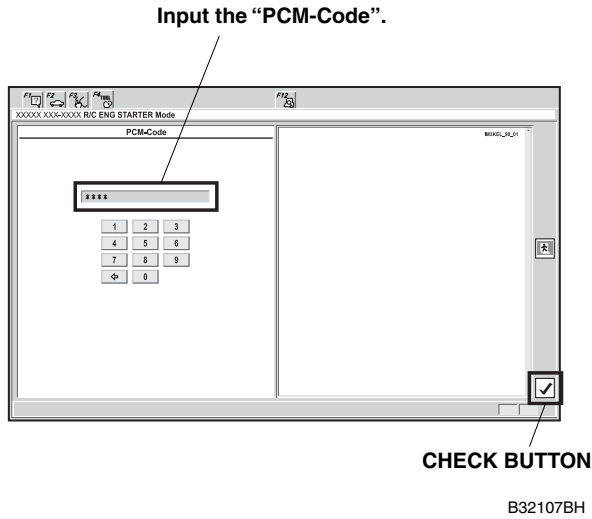
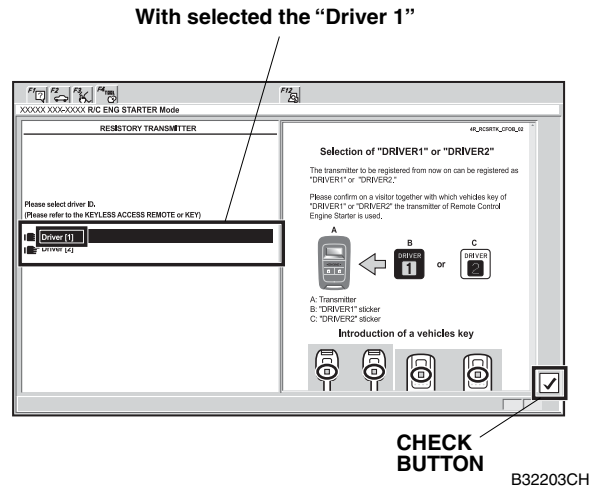- Without Keyless Memory Settings: Go to step 13.

With Keyless Memory Settings

Only some vehicles are equipped with the keyless memory settings. When following is not displayed, go to step 13.
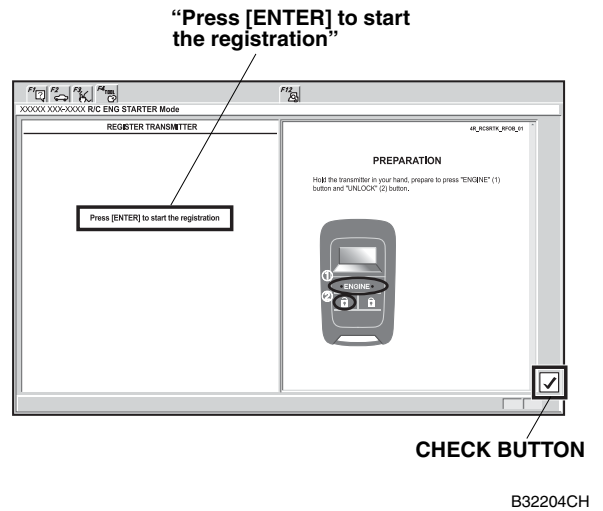
11. Confirm on a visitor together with which vehicles key of "DRIVER 1" or "DRIVER 2" the transmitter of Remote Control Engine Starter is used. Select the "DRIVER 1" or "DRIVER 2".

RESISTORY TRANSMITTER

Selection of "DRIVER1" or "DRIVER2"

The transmitter to be registered from now on can be registered as "DRIVER1" or "DRIVER2."

Please confirm on a visitor together with which vehicles key of "DRIVER1" or "DRIVER2" the transmitter of Remote Control Engine Starter is used.

Please select driver ID. (Please refer to the KEYLESS ACCESS REMOTE or KEY)

Driver [1]
Driver [2]

A: Transmitter
B: "DRIVER1" sticker
C: "DRIVER2" sticker

Introduction of a vehicles key

Select the driver ID.

B62990AH

12. Click the check button.

With selected the "Driver 1"

RESISTORY TRANSMITTER

Selection of "DRIVER1" or "DRIVER2"

The transmitter to be registered from now on can be registered as "DRIVER1" or "DRIVER2."

Please confirm on a visitor together with which vehicles key of "DRIVER1" or "DRIVER2" the transmitter of Remote Control Engine Starter is used.

Please select driver ID. (Please refer to the KEYLESS ACCESS REMOTE or KEY)

Driver [1]
Driver [2]

A: Transmitter
B: "DRIVER1" sticker
C: "DRIVER2" sticker

Introduction of a vehicles key

CHECK BUTTON

B32203CH

13. The following message will display: "Press [ENTER] to start the registration." Click the check button.

"Press [ENTER] to start the registration"

REGISTER TRANSMITTER

PREPARATION

Hold the transmitter in your hand, prepare to press "ENGINE" (1) button and "UNLOCK" (2) button.

Press [ENTER] to start the registration

CHECK BUTTON

B32204CH

AII 51947 (1407)

14. Within 15 seconds, press and release the "ENGINE" button then press the "UNLOCK" button within 2 seconds.
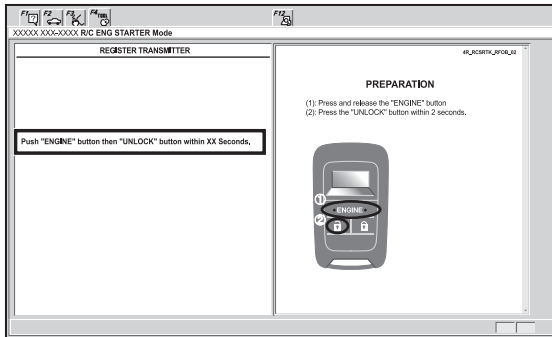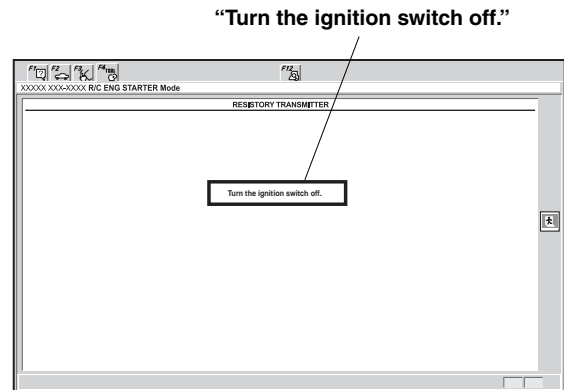

B32207BH

15. The following message will display: "COMPLETE", "Please paste the sticker (Driver 1, Driver 2, or Black) on the back side of the transmitter referring to the Help screen," "Press (ENTER)." Click the check button.
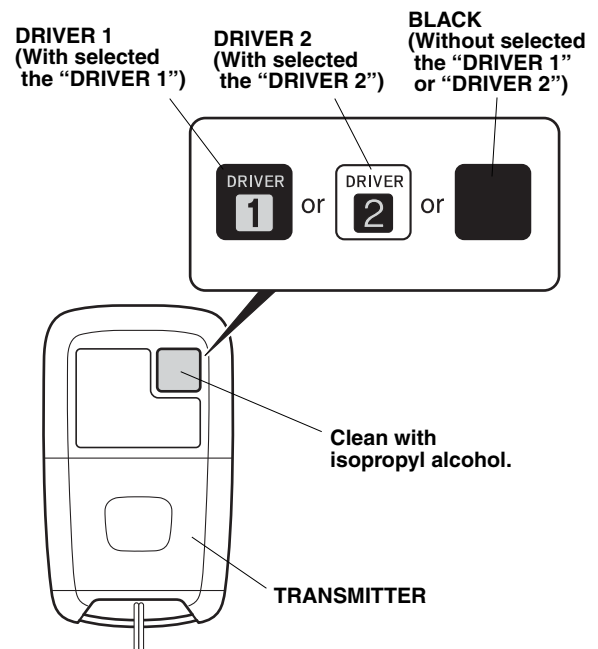
"Please paste the sticker of "XXXXXX" on the back side of the transmitter referring to the Help screen."

"COMPLETE"

"Press [ENTER]"

CHECK BUTTON
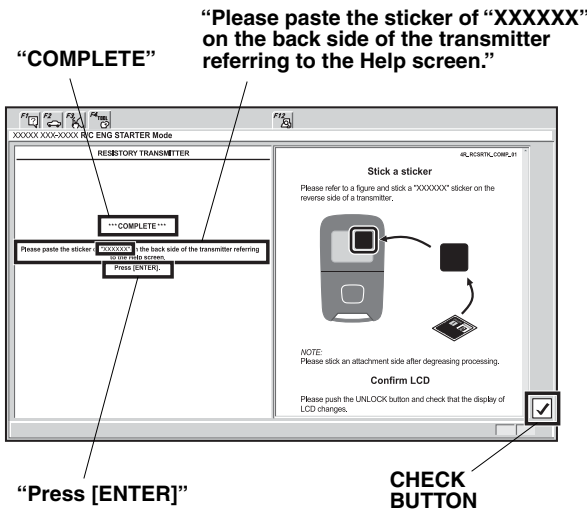
B32205BH

16. The following message will display: "Turn the ignition switch off." Turn the ignition switch off.

"Turn the ignition switch off."

B32206BH

17. Using isopropyl alcohol, clean the area where the ID label will attach.

DRIVER 1 (With selected the "DRIVER 1")   **DRIVER 2 (With selected the "DRIVER 2")**   **BLACK (Without selected the "DRIVER 1" or "DRIVER 2")**

Clean with isopropyl alcohol.

TRANSMITTER

B32850AH

18. Attach the ID label (Driver 1, Driver 2, or Black) to the transmitter as shown.

19. Make sure that the engine starter operates properly with the transmitter and additional transmitter.