
GENUINE PARTS





INSTALLATION INSTRUCTIONS


DESCRI APPLIC				
PART N	UMBER			
кіт со	NTENTS	6:		
Item	Qty.	Part Description		Service Part Number
A B	1 4	Trunk Organizer Velcro		999C2 J2000
C	1	Installation Instruction Replacement Template		999C2 J2000II
			A STATE OF THE STA	
		Α	В	С
TOOLS • N,	-	RED:		
PRE-IN	STALLA	TION WARNINGS, CAUTIONS, CRITICAL STE	PS, and NOTES:	
• Tr	unk Org	anizer can be installed in vehicles with or without	Trunk Protector installe	ed
		in the luster of your Trunk Organizer, clean with a dupholstery cleaners or soap and water.	cloth as required using	g standard automotive vinyl,
A WARNING				
		er is designed to transport normal cargo cont transported in your vehicle at any time.	ents. Flammable or	dangerous materials
Do not	exceed	the recommended load of 30 lbs in the Trunl	c Organizer.	
When u	-	is Trunk Organizer, avoid sudden starts/stop	s or sharp turns as tl	his may cause contents to

INSTALLATION PROCEDURE: <u>Q50 ONLY</u> WITH TRUNK PROTECTOR EQUIPPED





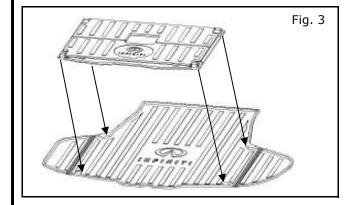




1) Ensure that Trunk Protector is clean with no objects on top surface

 Place closed Trunk Organizer onto Trunk Protector, making sure that Trunk Organizer corners are secured around corner/side features (see Fig. 3 & 4)


INSTALLATION PROCEDURE: <u>Q50 ONLY</u> WITH TRUNK PROTECTOR EQUIPPED (CONTINUED)




- 3) Open Trunk Organizer
 - a) Open main panels
 - b) Open and engage side panels into main panels

Note: Reverse this step to collapse Trunk Organizer


INSTALLATION PROCEDURE: WITHOUT TRUNK PROTECTOR EQUIPPED



- 4) Flip Trunk Organizer upside down
 - a) Peel backing liner off each velcro piece and
 - b) Attach to underside of Trunk Organizer in specified locations, 1" from edge



Place closed Trunk Organizer into vehicle cargo 5) area



VE

Repeat step 3 to open Trunk Organizer in vehicle 6)