



INFINITI®

## GENUINE PARTS

### INSTALLATION INSTRUCTIONS

<b>DESCRIPTION:</b>	Vehicle Cover		
<b>APPLICATION:</b>	QX60		
<b>PART NUMBER:</b>	999N2 RZ00x		
<b>KIT CONTENTS:</b>			
<b>Item</b>	<b>QTY</b>	<b>Part Description</b>	<b>Service Part Number</b>
A	1	Vehicle Cover	N/A
B	2	Storage Bag	N/A
C	3	Installation Instructions Replacement Template	N/A
<b>Note: An optional cable lock for the vehicle cover, part number 999N4 A7000, is available from your Nissan dealer.</b>			
<b>TOOLS REQUIRED:</b>	No Tools Required		


**PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:**

- Vehicle cover must be installed properly and completely. Do not use vehicle with cover installed.
- Wash cover on vehicle with mild soap. Allow sufficient time for cover to air dry completely before storing. DO NOT use bleach!
- If your vehicle is equipped with a cellular phone antenna, remove mast before installing cover.
- Some states require license plate number of a covered vehicle to be clearly displayed.
- Do not use: regular paint, spray paint, laundry markers, permanent type Magic markers, or any type of felt tip pen or marker.
- The only type of marking paint acceptable for use on this material is a permanent type fabric/t-shirt paint that is available at most fabric and supply stores.
- In high winds (and for prolonged outdoor storage), cover should be pulled tightly at center of vehicle using a length of rope routed through tie-down grommets in cover. This should be done even if optional cable lock is used. The cover can work loose and come off vehicle if a strong wind goes under the cover.
- Do not place vehicle cover over hot exhaust pipes.

**⚠ WARNING**

- Do not use this cover while towing a vehicle. The cover is not designed for use when towing and serious damage can occur to the cover and to the paint on the vehicle.

## INSTALLATION PROCEDURE:

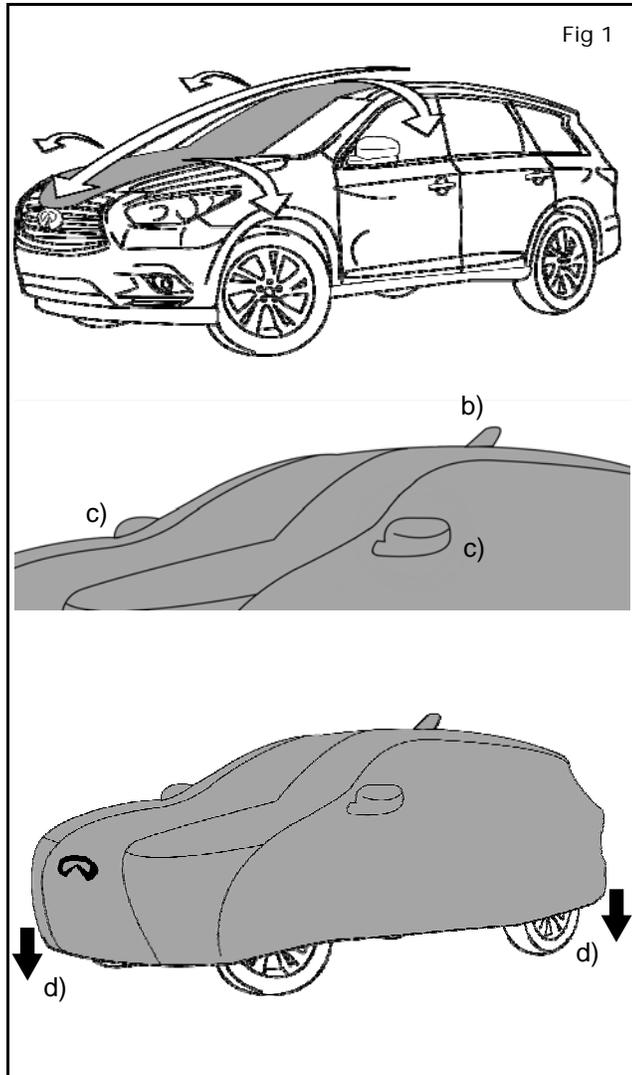

- 1) Installation of vehicle cover:
  - a) Unroll cover and position so Infiniti logo is at front of vehicle.

- b) Install antenna pocket over antenna.
  - c) Install mirror pockets over mirrors.

- d) Pull cover down over front and rear bumpers and adjust if necessary.

- 2) Removal of vehicle cover:
  - a) Release both ends of cover from under bumpers.
  - b) Fold both sides of vehicle cover toward center of vehicle making approximately 2 or 3 feet wide.
  - c) Start at front of vehicle and roll cover from front to the back.
  - d) Store cover in storage bag.

### NOTE

**Take care not to damage antenna during installation and removal of vehicle cover.**

**INSTALLATION PROCEDURE:** (continued)

- 4) Washing and Cleaning:
  - a) Machine Washing and Drying (Cover may be washed using a household washing machine and dryer):
    - 1) Use a powder type detergent without bleach.
    - 2) Wash cover using "Normal" or "Permanent Press" cycle in cold or warm water.
    - 3) Run cover through (2) rinse cycles - it is important that all detergent is removed.
    - 4) Cover can be dried in most household dryers. Use "Permanent Press" setting.
  - b) On-Vehicle Washing and Drying:
    - 1) Dust can be cleared off inside or outside surfaces by putting cover on vehicle and hosing it off with water. To clean inside, put cover on vehicle inside-out and hose off.
    - 2) After rinsing off cover, leave it on vehicle to dry.
    - 3) If cover becomes soiled in a few spots, light brushing with a soft rag will remove most dirt.
  - c) For Persistent Soils:
    - 1) Wet soiled area with water.
    - 2) Wash with a mixture of water and powder detergent, working lather into soiled area with a sponge.
    - 3) Rinse completely with water to remove all detergent residue.
    - 4) Air dry completely.