



INFINITI®

## INSTALLATION INSTRUCTIONS

### GENUINE PARTS

1. DESCRIPTION: Vehicle Cover

2. APPLICATION: Infiniti QX80

3. PART NUMBER: 999N2 3X001-Mosom Plus Material (Grey)  
999N2 3X002-Silver Guard Material (Silver)

#### 4. KIT CONTENTS:

Item No.	Qty.	Part Number	Description
1.)	1	N/A	Vehicle Cover
2.)	1		Storage Bag
3.)	1		Install Instruct. Replacement Template
4.)	1	999N4 A7000	Cable Lock (optional)

5. TOOLS REQUIRED: No Tools Required

#### 6. INSTALLATION NOTES / CARE & CLEANING:

Note: An optional cable lock for the vehicle cover, part number 999N4 A7000, is available from your Infiniti dealer.

- 1.) Vehicle cover must be installed properly and completely, do not use vehicle with cover installed.
- 2.) Wash cover on vehicle with mild soap. Allow sufficient time for cover to air dry completely before storing. DO NOT use bleach!

#### ⚠ WARNING

- Do not place vehicle cover over hot exhaust pipes.
- Warning for use in high wind areas: In high wind areas (and for prolonged outdoor storage), the cover should be pulled tightly at the center of the vehicle using a length of rope routed through the tie-down grommets in the cover. This should be done even if the optional cable lock is used. The cover can work loose and come off the vehicle if a strong wind goes under the cover.
- Do not use this cover while towing a vehicle. The cover is not designed for use when towing, serious damage can occur to the cover and to the paint on the vehicle.

#### ⚠ CAUTION

- If your vehicle is equipped with a cellular phone antenna, remove the mast before installing the cover.
- Some states require the license plate number of a covered vehicle to be clearly displayed; the only type of marking paint acceptable for use on this material is a permanent type fabric/t-shirt paint that is available at most fabric and supply stores. Do not use: regular paint, spray paint, laundry markers, permanent type Magic markers, or any type of felt-tip pen or marker.



INFINITI®

## INSTALLATION INSTRUCTIONS


### 7. INSTALLATION PROCEDURE

#### 0 BEFORE INSTALLATION


1. Read entire installation instructions before proceeding
2. Be careful not to damage any antenna or mirror pocket area when installing cover.
3. Watch for any sharp objects on vehicle that may rip the cover.

#### 1 LAY COVER OVER THE CENTER OF VEHICLE AND OPEN.

The Infiniti logo will be visible on the front of the vehicle cover

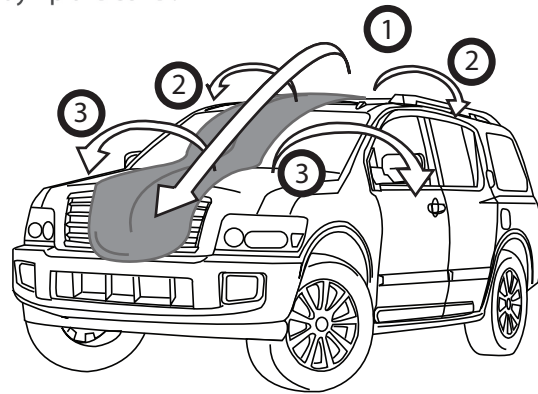


#### 2 You must first install the cover over the the mirror pockets. It is very important that this is done before the ends of the cover are stretched over the front and rear bumpers.

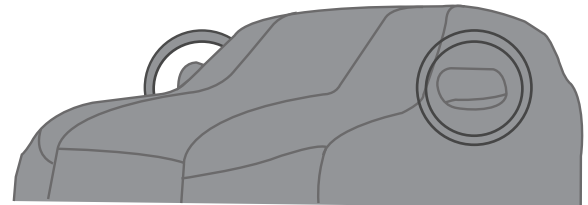

#### 3 INSTALL COVER OVER FRONT AND REAR BUMPERS

The elastic at each end of the cover will keep the cover in place under all normal conditions.

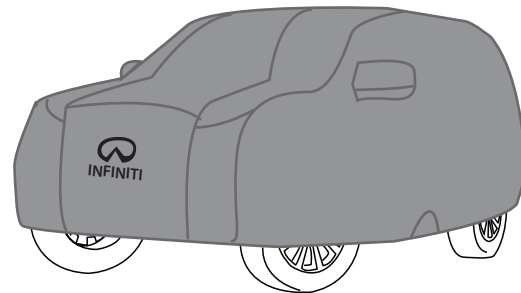

#### 4 REMOVAL

- A. The following procedure makes it easier to remove and install the cover whenever it is used.
  1. Release both ends of the cover from under the bumpers.
  2. Fold up both sides of the cover towards the center of the vehicle, onto it's top, approximately 2 or 3 feet wide.
  3. Start at the front of the vehicle and roll or fold the cover from the front to the back.
- D. Store cover in storage bag.

#### CAUTION

- During Installation and Removal, user should be careful with antenna.



INFINITI®

## INSTALLATION INSTRUCTIONS

### CAUTION

- Do not wash in hot water.
- Do not use fabric softener.

### 8. Washing and Cleaning

#### 1.) Machine Washing and Drying

a.) Any Cover will slowly collect dust on the underside, picked up from contact with the surface of the vehicle. Dirt on your cover's surface will degrade its ability to repel water. It is very important to keep the fabric as clean as possible. Your cover may be washed using a household washing machine and dryer

b.) Use a powder type detergent without bleach.

1.) Wash cover using "Normal" or "Permanent Press" cycle in cold or warm water.

2.) Run cover through two (2) rinse cycles- it is important that all the detergent is removed.

3.) The cover can be dried in most household dryers. Use the "Permanent Press" setting.

#### 2.) On Vehicle Washing and Drying

a.) Dust can be cleaned off the inside or outside surfaces by putting the cover on the vehicle and hosing it off with water. To clean the inside, put the cover on the vehicle inside-out and hose off.

b.) After rinsing off the cover, leave it on the vehicle to dry.

c.) If the cover becomes soiled in a few spots, light brushing with a soft rag will remove most dirt.

#### 3.) For Persistent Soils

a.) Wet soiled area with water.

b.) Wash with a mixture of water and powder detergent, working the lather into the soiled area with a sponge.

c.) Rinse completely with water to remove all detergent residue.

d.) Air dry completely.