





GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION:	Blind Spot Mirror Accessory Kit
APPLICATION:	Rogue, Murano
PART NUMBER:	999L1-G2000, 999L1-G20H0

KIT CONTENTS:

Item	Qty.	Part Description
A	1	Blind Spot Mirror - LH
B	1	Blind Spot Mirror - RH
C	1	Installation Instruction Replacement Template

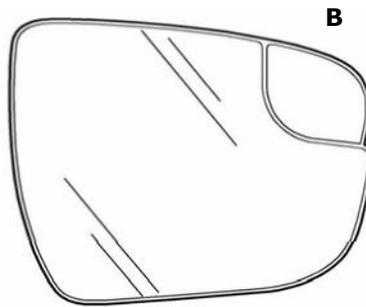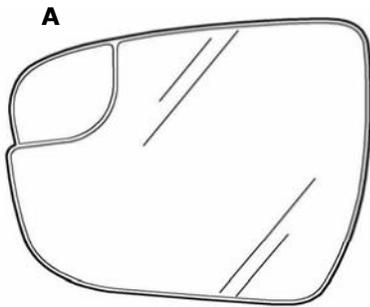

TOOLS REQUIRED:

- Carbon Fiber Pry Tool with Narrow Tip
- Masking Tape
- Flathead Screwdriver


PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS and NOTES:

- These installation instructions are for the left side of the vehicle; the same procedure applies to the right side.
- Dealer Installation recommended.
- Protective gloves are recommended to prevent damage and/or scratches to the mirror and vehicle.

INSTALLATION PROCEDURE:

Driver Side


Fig. 1

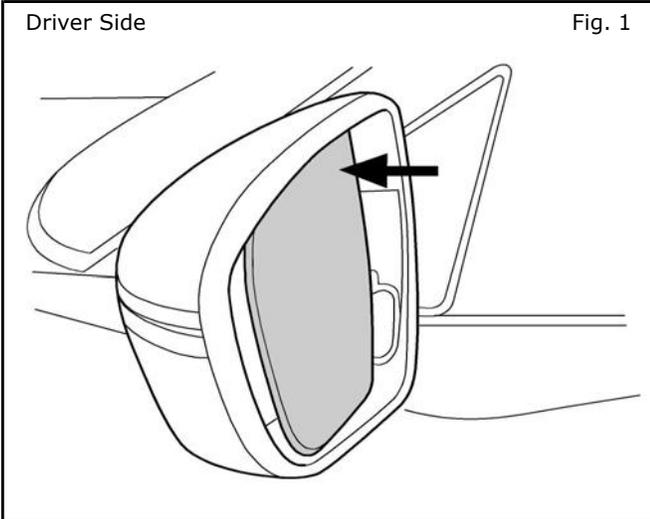

- 1) Adjust driver side mirror so glass is tipped inboard as much as possible. This will expose access point for removing existing glass assembly from mirror housing.


Driver Side

Fig. 2

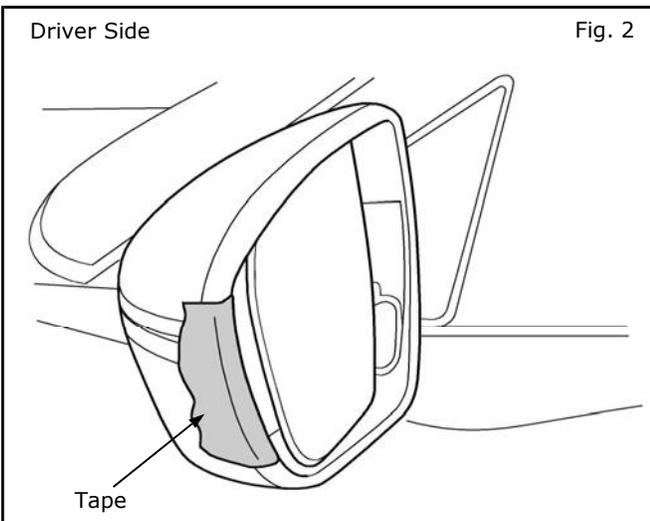


- 2) Apply protective tape to outer edge of mirror housing as shown to protect it from damage while removing mirror glass assembly.

Fig. 3

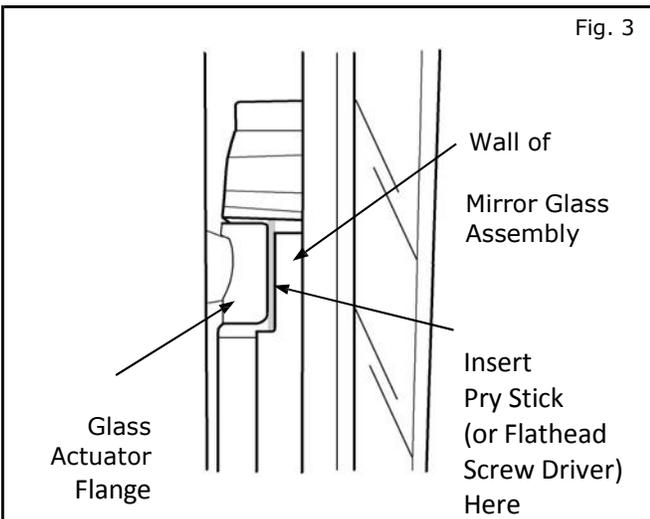


- 3) Looking in through edge of mirror housing, locate intersection between flange of glass actuator and back wall of mirror glass Assembly. Insert a pry stick with a narrow tip or a flathead screwdriver and carefully pry off glass assembly.

INSTALLATION PROCEDURE:

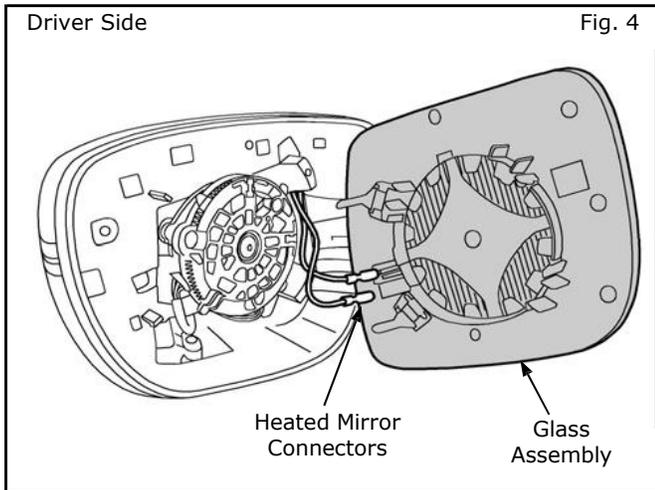


4) Carefully remove glass assembly from mirror housing.

NOTE: If the mirror being serviced is a heated mirror, there will be two wires that need to be disconnected from the back side of the glass assembly.

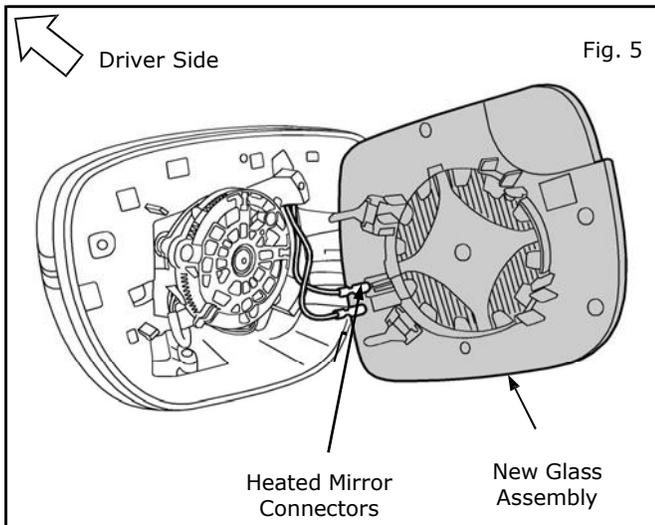

5) Begin installation of new Blind Spot Mirror Glass Assembly by reconnecting heater wires if necessary.

NOTE: Both wires are black and it does not matter which wire goes to which post.

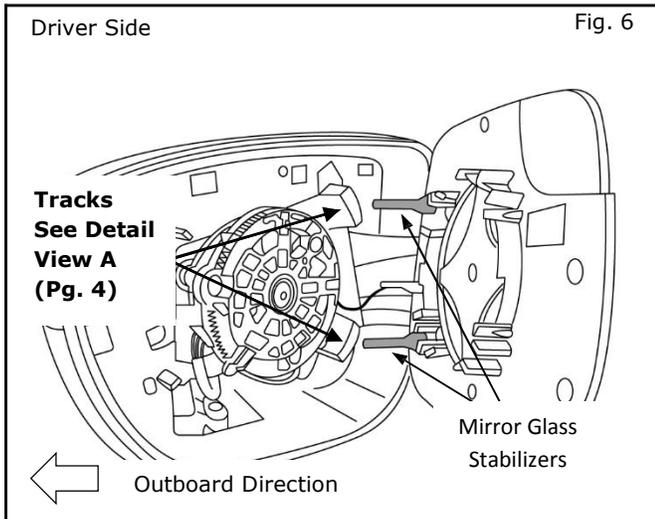

6) During glass installation, as BZM assembly is positioned within mirror housing, be sure two **mirror glass stabilizers** are lined up with **mirror stabilizer tracks** and make sure stabilizers are located on **OUTBOARD** edge of tracks.


NOTE: Be sure the new glass assembly is centrally located within the perimeter of the mirror housing and verify stabilizer location before securing the backing plate.

If necessary, use a flashlight to verify correct stabilizer positioning at outboard side of tracks.

INSTALLATION PROCEDURE:

Driver Side

Fig. 7

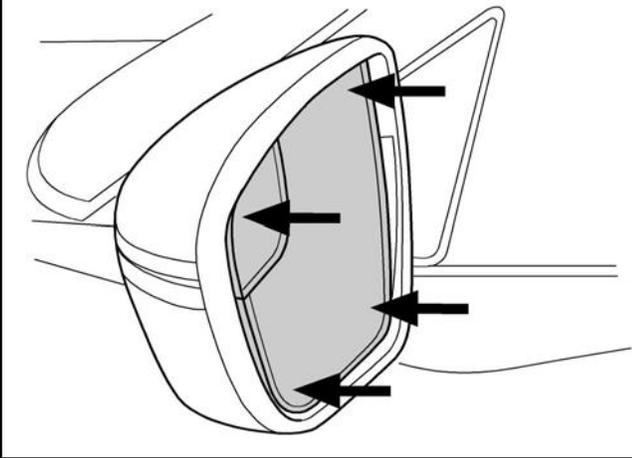

7) Using even pressure, press firmly on new glass assembly to seat it into mirror housing. Take care that initial force applied is **perpendicular** to Mirror Housing. You will hear and feel a definitive snap as mirror glass assembly engages with glass actuator.

Once new glass assembly is secured, with a gloved hand, carefully rock BZM glass assembly into each corner of Mirror Housing while still applying firm pressure at center of glass to insure retention snaps are properly engaged.

NOTE: Use extreme caution to not apply excessive force as this may cause irreversible damage to the glass assembly.

8) Remove protective tape and clean any finger prints, smudges, or tape residue that may have resulted from installation.

9) Repeat for passenger side of vehicle

Detail View A
Driver Side

Outboard Side
(On Vehicle Position)

NOTE:
Stabilizer must contact
this surface.

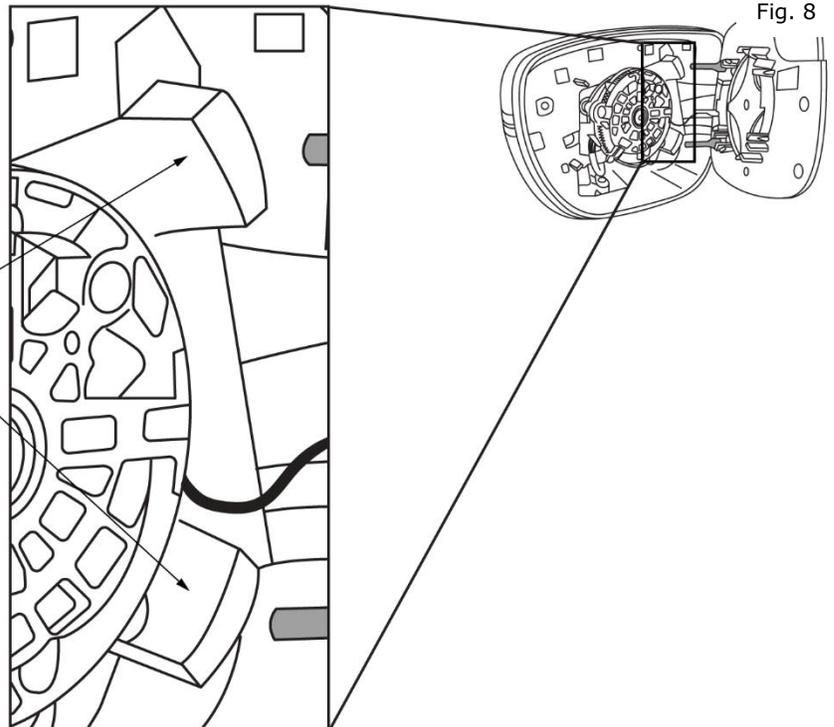


Fig. 8