




# GENUINE PARTS

## INSTALLATION INSTRUCTIONS


<b>DESCRIPTION:</b>	Nose Mask
<b>APPLICATION:</b>	Rogue
<b>PART NUMBER:</b>	999N1 G2000

### KIT CONTENTS:

Item	Qty.	Part Description
A	1	Nose Mask - Main
B	1	Nose Mask - Hood
C	1	Installation Instructions replacement Template

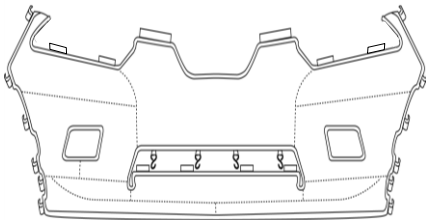

A

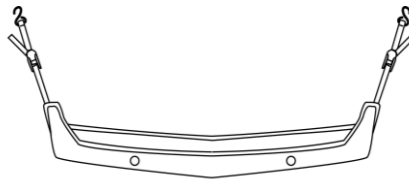

B



C

### TOOLS REQUIRED:

- Scissors
- Screwdriver

### PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

- The area to be covered by the mask must be free of dirt. The flannel surface of the nose mask must be especially clean.
- Both the vehicle and the mask must be completely dry. If moisture is present under the mask and is allowed to dry, it may cause the paint to cloud. If mask gets wet, remove and allow to dry completely.
- Any repainted surface in contact with mask must be completely cured.
- DO NOT pull the mask from any of the openings when installing the mask. This may result in DAMAGE to your mask.
- If the nose mask should flap due to high speed or wind conditions, stop car and adjust or remove mask.


**CARE OF NOSE MASK:**

- To clean the vinyl and flannel backing, use a cleaner such as "409" or "Fantastic".
- The vinyl surface may be cleaned by simply spraying the cleaner onto the vinyl and wiping off with a cloth or sponge.
- To clean the flannel backing, liberally spray the cleaner on the area to be cleaned. If heavily soiled, use a cloth or sponge with the cleaner and rub the soiled area gently. Repeat if necessary. Rinse completely with clear water when finished. Hang to dry, but not in direct sunlight. Before installation, ensure both the vehicle and the nose mask are completely dry. If there is moisture under the nose mask and it is not allowed to dry, paint clouding can occur.

 **CAUTION**


- Attach all elastics with hooks and clips carefully and securely. Accidental release may cause injury.

## INSTALLATION PROCEDURE:

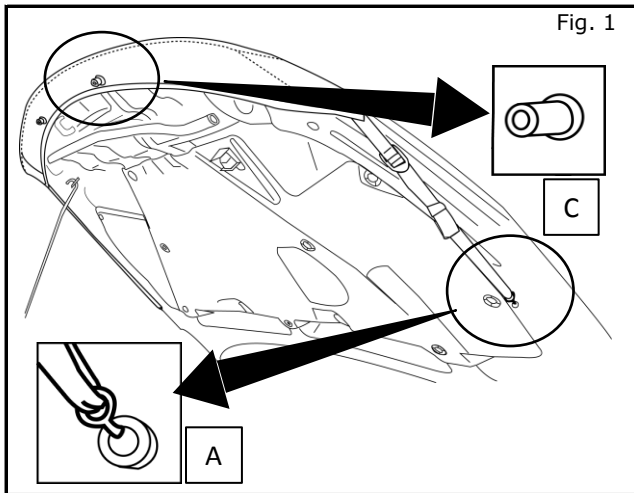


### 1) Install hood mask.

- a) Attach hook with long strap to hole on underside of hood and gently tighten to retain hook in hole.
- b) Repeat step a) on other side of vehicle.
- c) Adjust hood mask so that rubber bumpers pass through holes.
- d) Gently pull mask snug to hood, tighten straps and secure loose ends in elastic loops.

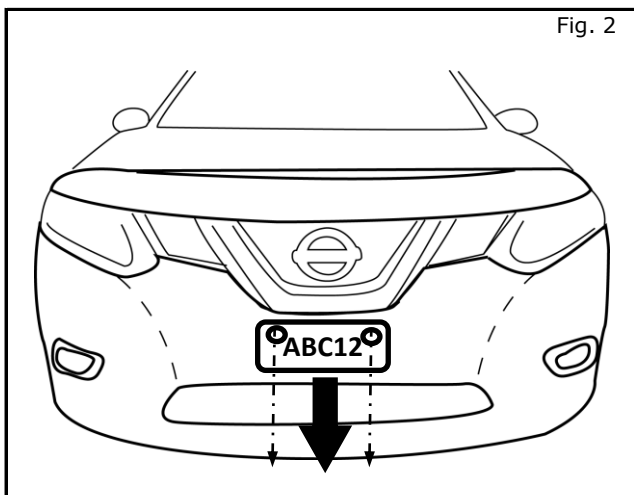

### 2) Remove license plate and bracket (if applicable).


- a) Remove 2 licence plate screws.
- b) Remove 2 license plate bracket screws.

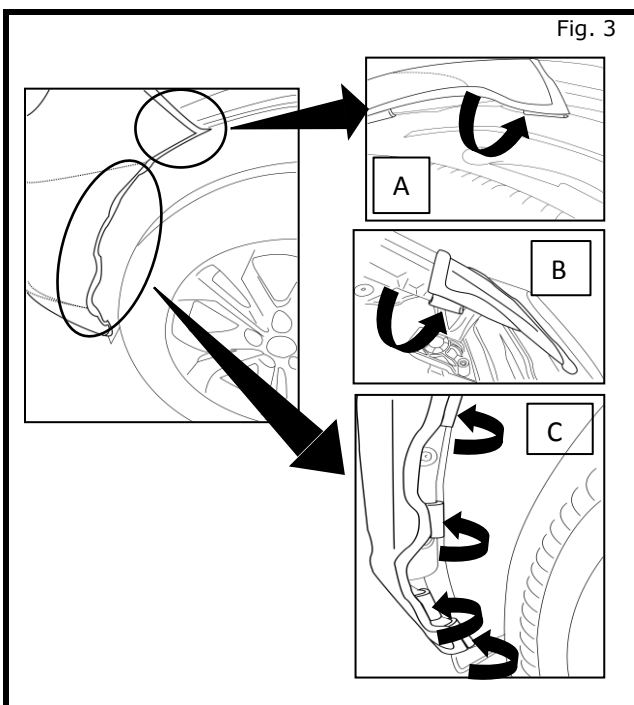

### 3) Install Nose Mask in wheel wells.


- a) Install top retainer clip to fender edge (attach above wheel well trim fastener)
- b) Install mask fender tip and secure with clip.
- c) Install remaining 4 wheel well clips to edge of fascia.
- d) Repeat steps a), b) and c) on other side.

**INSTALLATION PROCEDURE:** (continued)

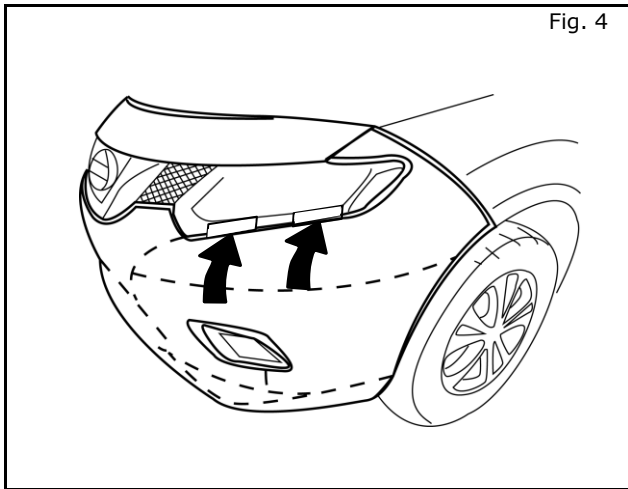


**4) Install mask at headlights.**

- a) Pull up on mask and insert 2 pads in gap under headlight.
- b) Repeat on other side.

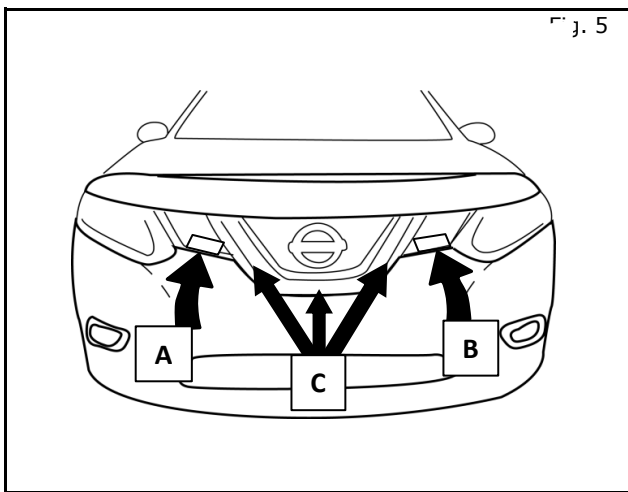

**5) Secure mask at upper grille.**


- a) Insert pad into gap between upper grille and fascia.
- b) Repeat on other side.
- c) Tuck mask into gap under edge of chrome grille feature.

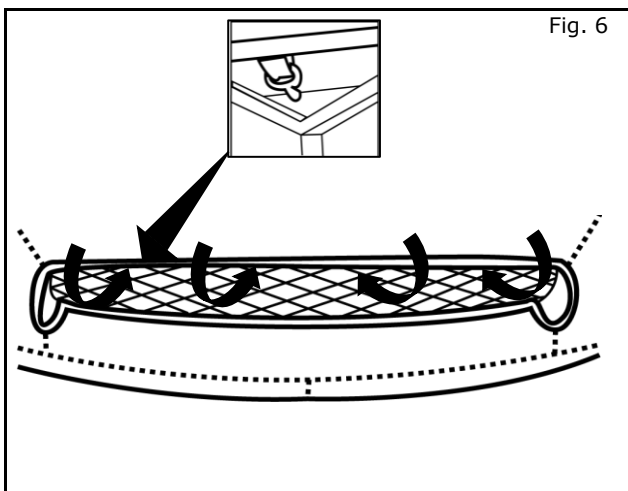

**6) Secure mask at lower grille (upper edge).**


- a) Attach 4 hooks to upper edge of grille.

**INSTALLATION PROCEDURE:** (continued)

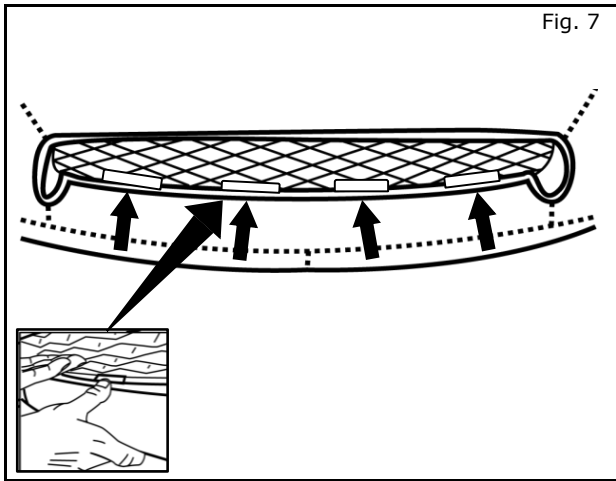

**7) Secure mask at lower grille (lower edge).**

- a) Pull up on grill and insert 4 pads into gap between lower edge of grille and front fascia.

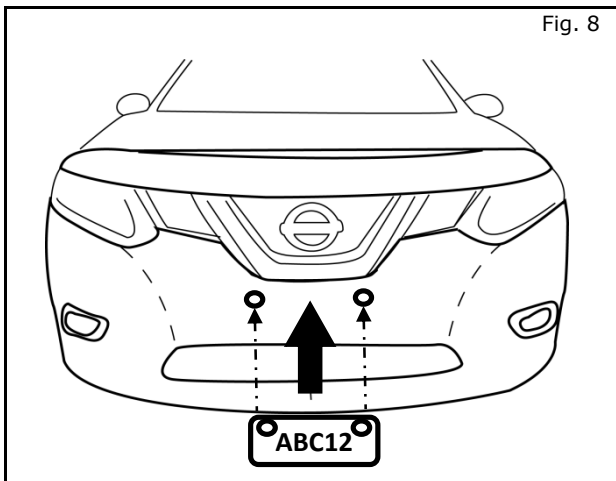

**8) Reinstall license plate bracket and license plate.**

- a) Poke holes through mask into license plate retainer holes.
- b) Cut 1"-2" clearance holes in Nose Mask allowing license plate to rest on fascia.
- c) Reinstall license plate bracket and license plate.

**ACCESSORY CHECK:**

- Inspect for loose clips or hooks.
- Ensure mask installation is secured properly prior to driving.