


GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION: Door Sill Protector			
APPLICATION: Sentra			
PART NUMBER: T99G6 L3000			
KIT CONTENTS:			
Item	QTY	Part Description	Service Part Number
A		Front Door Sill Protectors	T99G6 L3000
В	1	Installation Instruction Replacement Template	
Empirical kind below benefation			
		А	В
TOOLS	REQUIF	RED:	
Soft Lint Free Micro fiber Cloth Measuring Tape			
Masking Tape 90% or greater alcohol solution			
Plastic Squeegee			
 Dealer Installation Recommended. Install in a non-dusty environment. Thoroughly wash vehicle with soap and water. Alcohol wipe painted surface prior to application. Use tabs when handling Sill Protector so no finger prints are left on adhesive. Install at ambient temperature of 65-90° F. 			

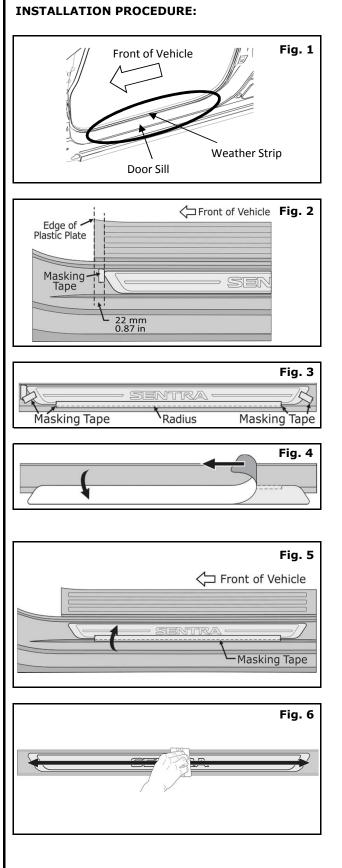

- Thoroughly clean driver side front door sill and black weather strip area with soap and water to remove any dirt or debris. Allow to dry. (Fig. 1)
- Using a clean, lint-free cloth and 90% alcohol solution, clean area on door where Sill Protector will be installed. (Fig. 1)
- Locate edge of plastic plate and align Sill Protector edge 22 mm (0.87 in) away. Place masking tape to mark this location. (Fig. 2) Do not let Sill Protector wrap past outside edge of radius.
- Note: The Sill Protector is a universal part for both sides of vehicle, (DRIVER'S SIDE SHOWN).
- Align bottom edge parallel to radius. Tape two ends into position and tape along bottom edge to create a hinge (Fig. 3).
- 5) Remove tape at ends. Flip Sill Protector over (along tape hinge) and remove the white liner **(Fig. 4)**.
- 6) Flip Sill Protector back into position along tape hinge (Fig. 5).

- Firmly squeegee Sill Protector to the vehicle with long smooth overlapping strokes, starting in the center working out to each end. Remove masking tape. (Fig. 6)
- 8) Repeat steps 1 through 7 for passenger side.