




GENUINE PARTS

INSTALLATION INSTRUCTIONS

DESCRIPTION: Speaker Ring Appliqué
APPLICATION: Nissan Versa Note (Hatch Back)
PART NUMBER: 999G3 44100 / 01 / 02 / 03 / 04 / 05

KIT CONTENTS:

| Item | Qty. | Description |
|------|------|----------------------------------|
| A | 4 | Speaker Ring Applique |
| B | 4 | Alcohol wipe |
| C | 1 | Instruction Replacement Template |



A



B



C

TOOLS REQUIRED:

- None.




PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:

- Read the installation sheet and check the entire kit for possible damage or defects before performing any work.
- Always dry fit parts before removing the adhesive liners to ensure proper fit, alignment, and component location. Kit contents are labeled to indicate proper location.

CAUTION

- Do not touch the tape side with your fingers to avoid contaminating the tape and reducing adhesion strength.
- These parts are to be installed when the ambient temperature is between 60°F - 80°F, (16°C - 26 °C).
- Do not wash or expose the vehicle to a wet environment for 24 hours after installing the Appliqués.
- The tape will set in 15-20 seconds after the installation.
- Do not reposition the appliqués once the tape has started to set/adhere to vehicle.

INSTALLATION PROCEDURE:

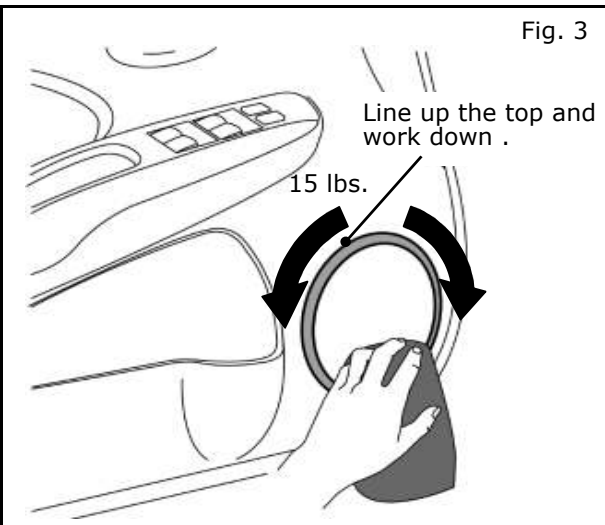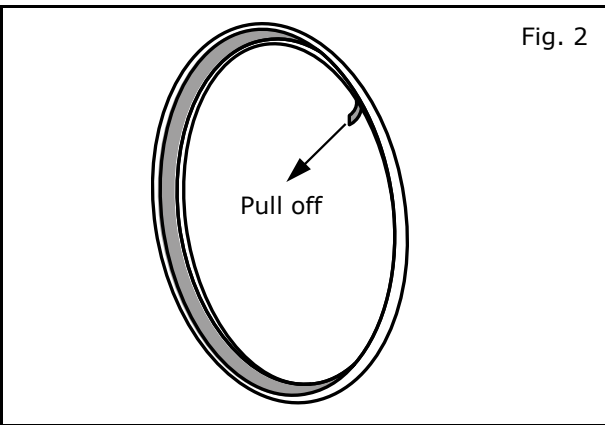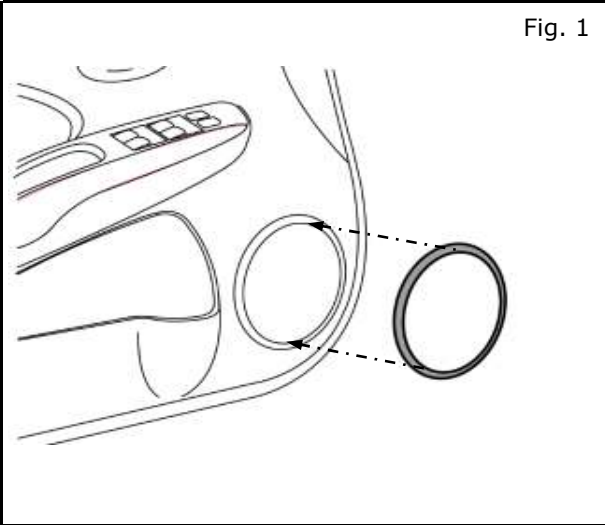

- 1) Locate speaker ring, and dry fit part before removing the adhesive liner. Establish correct part orientation that minimizes gap around the perimeter.
(Fig. 1)
- 2) Use an alcohol wipe to clean the area of the vehicle where this appliqué is to adhere.
- 3) Remove adhesive liner from back of the speaker ring applicator.
(Fig. 2)
- 4) Carefully and lightly place part in position by lining up the top of the applique, and work your way down.
(Fig. 3)
- 5) Once applique is in correct position, use clean towel to apply minimum 15 lbs of pressure over entire surface, for at least 30 seconds.
(Fig. 3)
- 6) Repeat steps 1 to 5 for remaining speaker rings.