




GENUINE PARTS


INSTALLATION INSTRUCTIONS

DESCRIPTION:	Vehicle Cover													
APPLICATION:	Rogue													
PART NUMBERS:	999N2 G2001-Tri Guard Material (Grey) 999N2 G2002-Silver Guard Plus Material (Silver)													
KIT CONTENTS:														
	<table border="1"><thead><tr><th>Item</th><th>QTY</th><th>Part Description</th></tr></thead><tbody><tr><td>A</td><td>1</td><td>Vehicle Cover</td></tr><tr><td>B</td><td>1</td><td>Storage Bag</td></tr><tr><td>C</td><td>1</td><td>Installation Instructions Replacement Template</td></tr></tbody></table>	Item	QTY	Part Description	A	1	Vehicle Cover	B	1	Storage Bag	C	1	Installation Instructions Replacement Template	
Item	QTY	Part Description												
A	1	Vehicle Cover												
B	1	Storage Bag												
C	1	Installation Instructions Replacement Template												
	Note: An optional cable lock for the vehicle cover, part number 999N4 A7000, is available from your Nissan dealer.													
TOOLS REQUIRED:	No Tools Required													
PRE-INSTALLATION WARNINGS, CAUTIONS, CRITICAL STEPS, and NOTES:	<ul style="list-style-type: none">• Vehicle cover must be installed properly and completely. Do not use vehicle with cover installed.• Wash cover on vehicle with mild soap. Allow sufficient time for cover to air dry completely before storing. DO NOT use bleach!• If your vehicle is equipped with a cellular phone antenna, remove mast before installing cover.• Some states require license plate number of a covered vehicle to be clearly displayed.• Do not use: regular paint, spray paint, laundry markers, permanent type Magic markers, or any type of felt tip pen or marker.• The only type of marking paint acceptable for use on this material is a permanent type fabric/t-shirt paint that is available at most fabric and supply stores.• In high winds (and for prolonged outdoor storage), cover should be pulled tightly at center of vehicle using a length of rope routed through tie-down grommets in cover. This should be done even if optional cable lock is used. The cover can work loose and come off vehicle if a strong wind goes under the cover.• Do not place vehicle cover over hot exhaust pipes.													
	⚠ WARNING													
	<ul style="list-style-type: none">• Do not use this cover while towing a vehicle. The cover is not designed for use when towing and serious damage can occur to the cover and to the paint on the vehicle.													


INSTALLATION PROCEDURE:

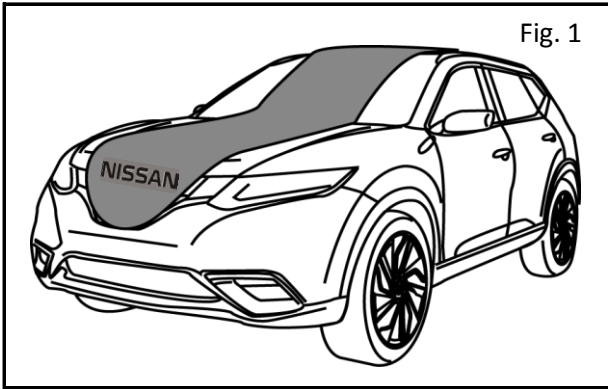

- 1) Installation of vehicle cover:
 - a) Unroll cover and position so that the Nissan logo is at front of vehicle.

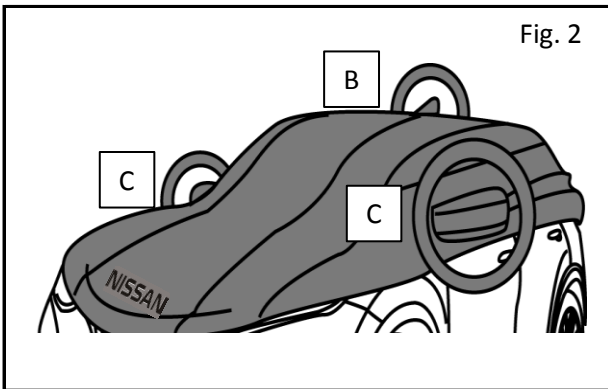

- b) Install pocket over antenna.
 - c) Install pockets over mirrors.

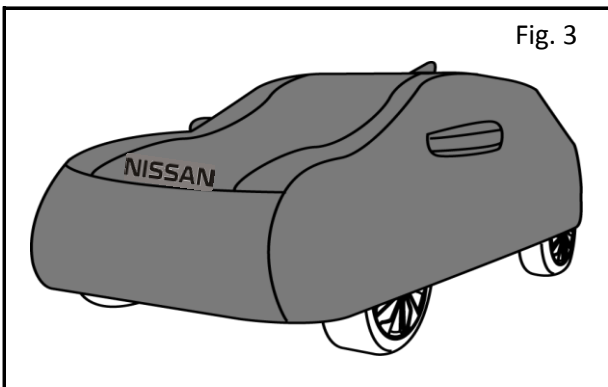

- d) Pull cover down over front and rear bumpers and adjust if necessary.

- 2) Removal of vehicle cover:
 - a) Release both ends of cover from under bumpers.
 - b) Fold both sides of vehicle cover toward the center of vehicle making it approximately 2 or 3 feet wide.
 - c) Start at front of vehicle and roll cover from the front to the back.
 - d) Store cover in storage bag.

INSTALLATION PROCEDURE: (continued)

- 3) Washing and Cleaning:
 - a) Machine Washing and Drying (Cover may be washed using a household washing machine and dryer):
 - 1) Use a powder type detergent without bleach.
 - 2) Wash cover using "Normal" or "Permanent Press" cycle in cold or warm water.
 - 3) Run cover through (2) rinse cycles - it is important that all detergent is removed.
 - 4) Cover can be dried in most household dryers. Use "Permanent Press" setting.
 - b) On-Vehicle Washing and Drying:
 - 1) Dust can be cleared off inside or outside surfaces by putting cover on vehicle and hosing it off with water. To clean inside, put cover on vehicle inside-out and hose off.
 - 2) After rinsing off cover, leave it on vehicle to dry.
 - 3) If cover becomes soiled in a few spots, light brushing with a soft rag will remove most dirt.
 - c) For Persistent Soils:
 - 1) Wet soiled area with water.
 - 2) Wash with a mixture of water and powder detergent, working lather into soiled area with a sponge.
 - 3) Rinse completely with water to remove all detergent residue.
 - 4) Air dry completely.