







**INSTALLATION
INSTRUCTIONS**

PART NUMBER: F541SAL100


DESCRIPTION: MOONROOF AIR DEFLECTOR

VEHICLE DESCRIPTION: SUBARU LEGACY

<p>A</p> 			<p>B</p>  <p>1x 2x</p>	<p>C</p>  <p>2x</p>	<p>D</p>  <p>2x</p>
<p>E</p>  <p>2x</p>	<p>F</p>  <p>1x</p>	<p>G</p>  <p>2x</p>	<p>H</p>  <p>2x</p>		


Tools Required

Phillips Head Screwdriver



NO POWER TOOLS



Meaning of Characters:




IMPORTANT NOTES

- DO NOT USE SOLVENT BASED CLEANERS ON MOONROOF AIR DEFLECTOR.
- DO NOT USE LOCTITE ON DEFLECTOR ATTACHING SCREWS.
- USE SOAP AND WATER ONLY TO CLEAN MOONROOF AIR DEFLECTOR.


The moonroof air deflector is designed to reduce wind noise when the moonroof is in the opened position. However, in some cases wind noise may be slightly louder with the moonroof in the tilt or closed position.

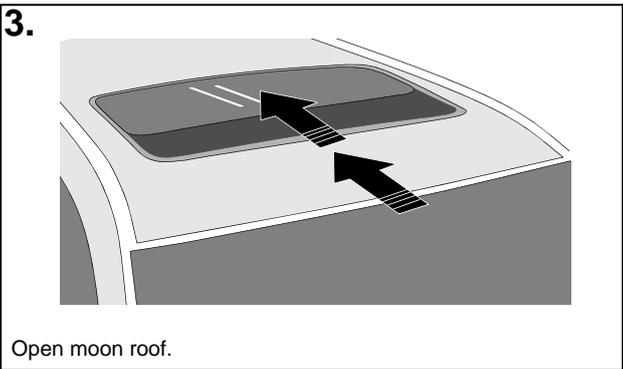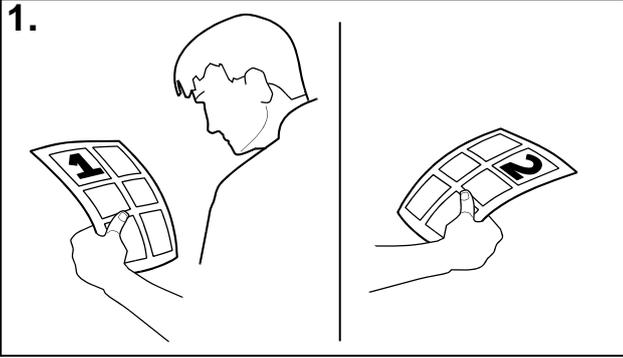


Open moon roof.

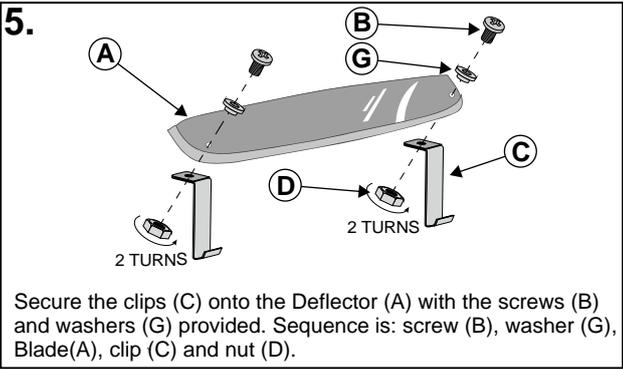


Secure the clips (C) onto the Deflector (A) with the screws (B) and washers (G) provided. Sequence is: screw (B), washer (G), Blade(A), clip (C) and nut (D).

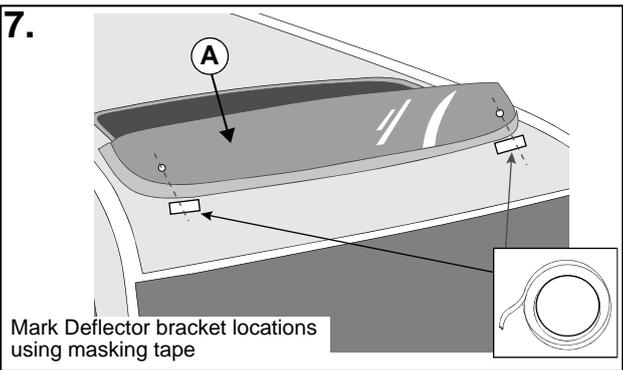


Mark Deflector bracket locations using masking tape

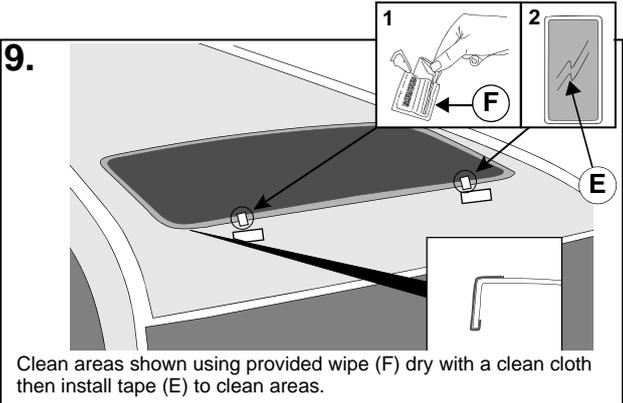


Clean areas shown using provided wipe (F) dry with a clean cloth then install tape (E) to clean areas.

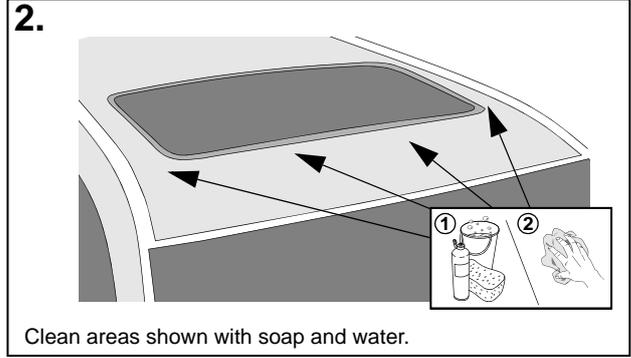


Clean areas shown with soap and water.

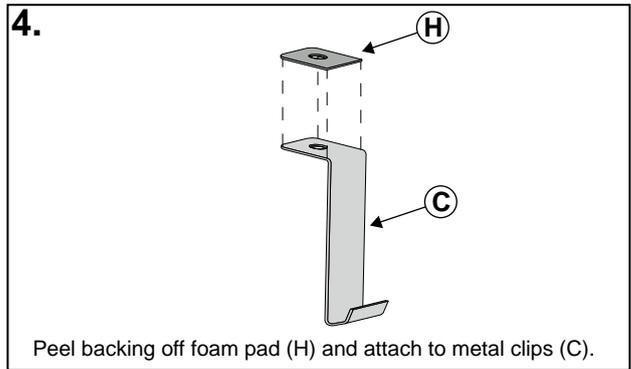


Peel backing off foam pad (H) and attach to metal clips (C).

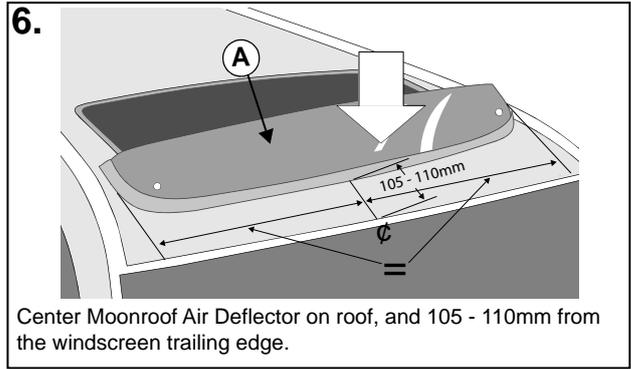






Center Moonroof Air Deflector on roof, and 105 - 110mm from the windscreen trailing edge.

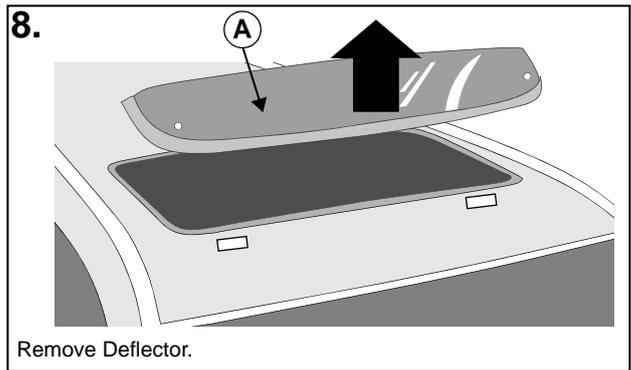


Remove Deflector.

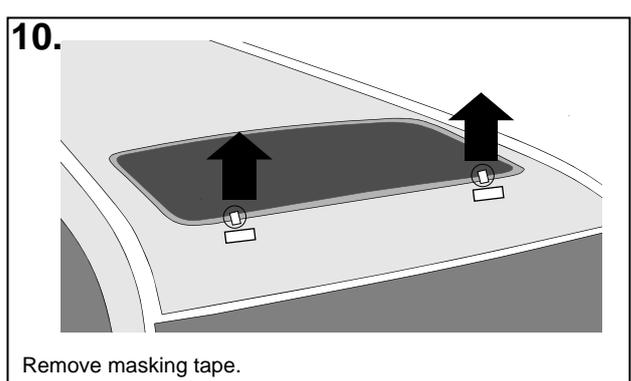

Remove masking tape.

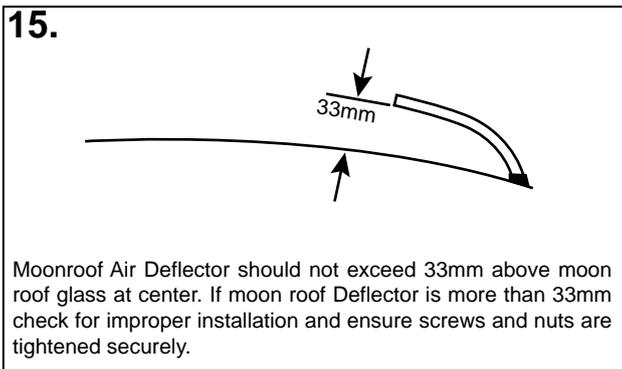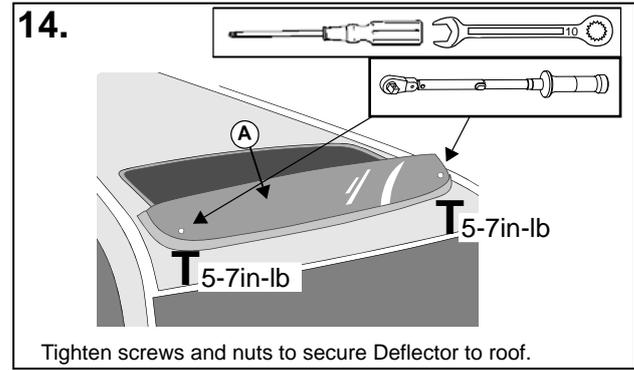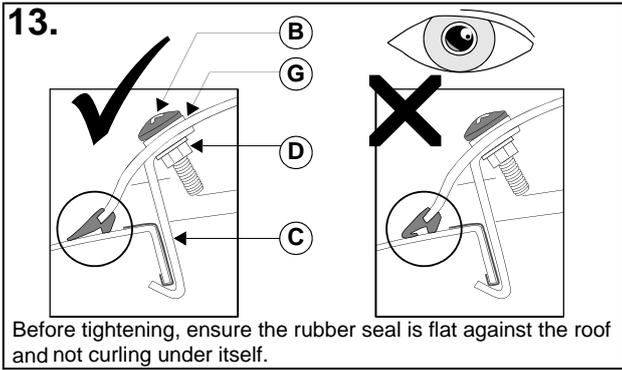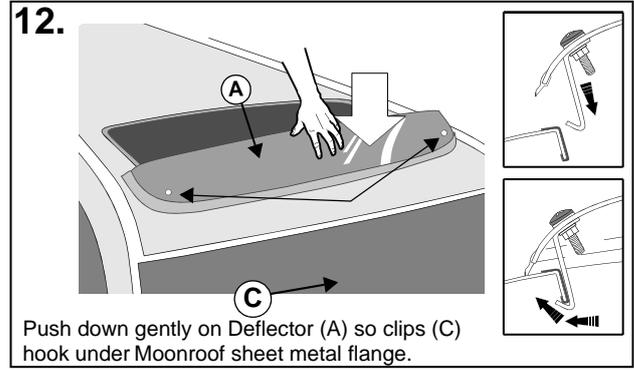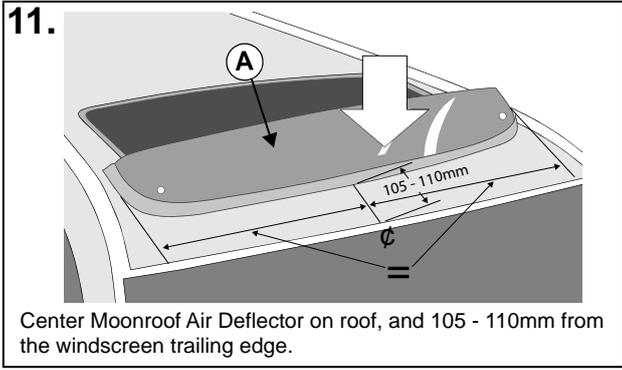

!
DO NOT USE solvent based cleaners on Moonroof Air Deflector.
USE soap and water only to clean Moonroof Air Deflector.









INSTRUCTIONS
D'INSTALLATION

NUMÉRO DE PIÈCE : F541SAL100



DESCRIPTION : DÉFLECTEUR D'AIR DE TOIT OUVRANT

DESCRIPTION DU VÉHICULE : SUBARU LEGACY

A  1x		B  2x	C  2x	D  2x	
E  2x	F  1x	G  2x	H  2x		

Outils requis

Tournevis Phillips




AUCUN OUTIL ÉLECTRIQUE

Signification des symboles :













T : Couple de serrage








REMARQUES IMPORTANTES

- N'UTILISEZ PAS DE NETTOYANT À SOLVANT SUR LE DÉFLECTEUR D'AIR DU TOIT OUVRANT.
- N'UTILISEZ PAS DE FREIN FILETS (LOCTITE) SUR LES VIS DU DÉFLECTEUR D'AIR.
- UTILISEZ UNIQUEMENT DU SAVON ET DE L'EAU POUR NETTOYER LE DÉFLECTEUR D'AIR.

Le déflecteur d'air est conçu pour réduire le bruit de vent quand le toit ouvrant est en position ouverte. Toutefois, dans certains cas, le bruit peut être un peu plus fort si le toit est ouvert en inclinaison ou s'il est fermé.

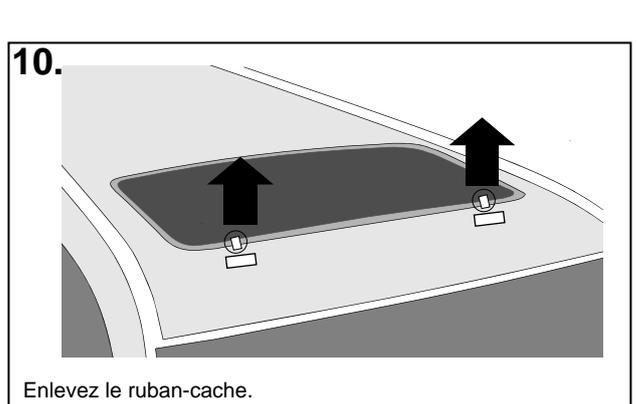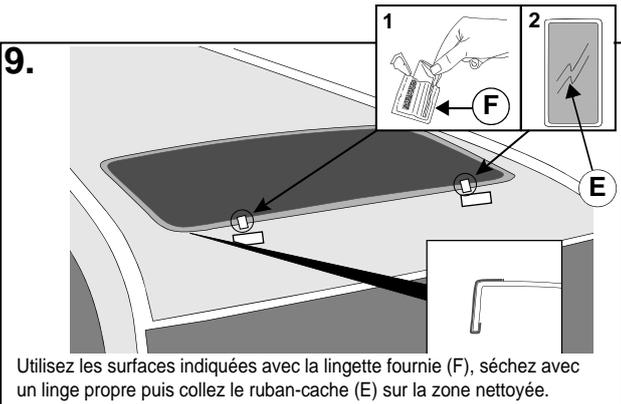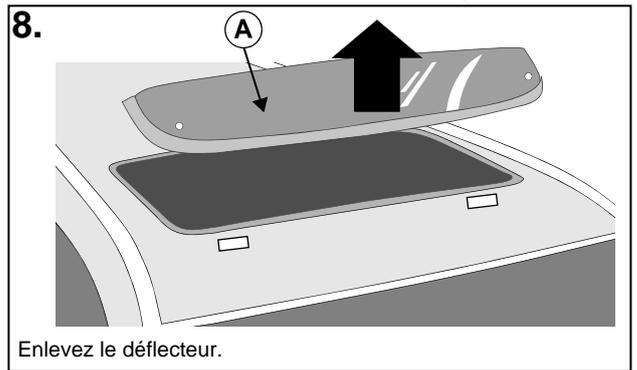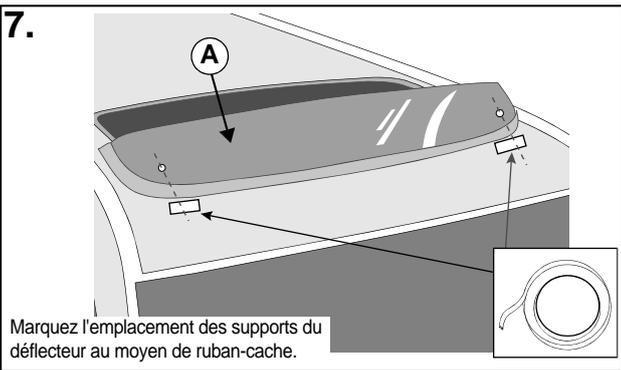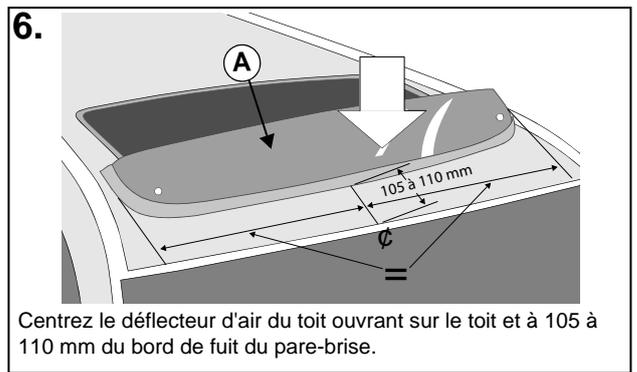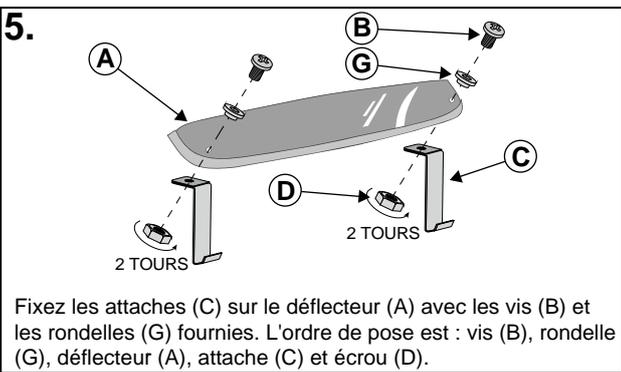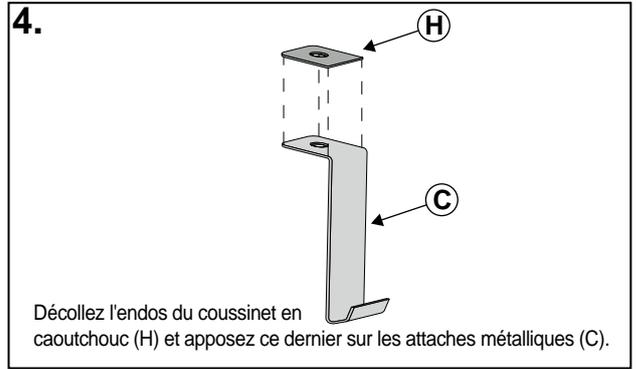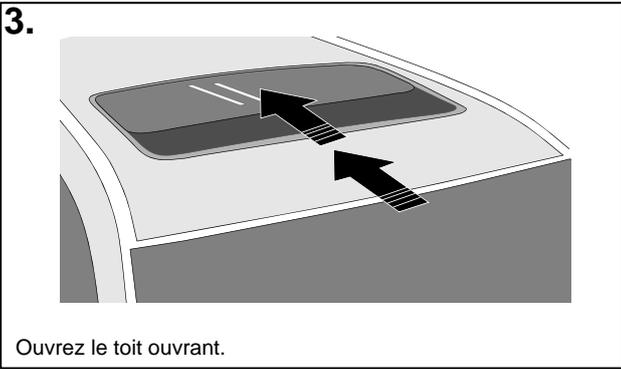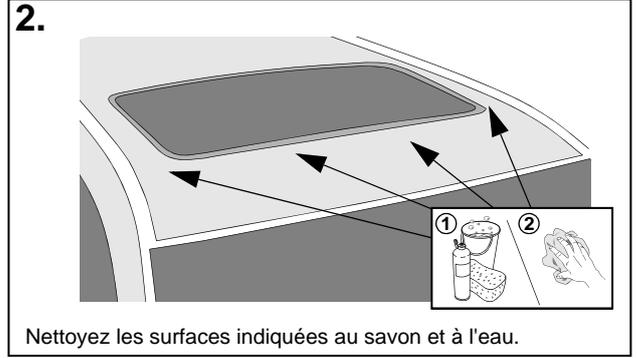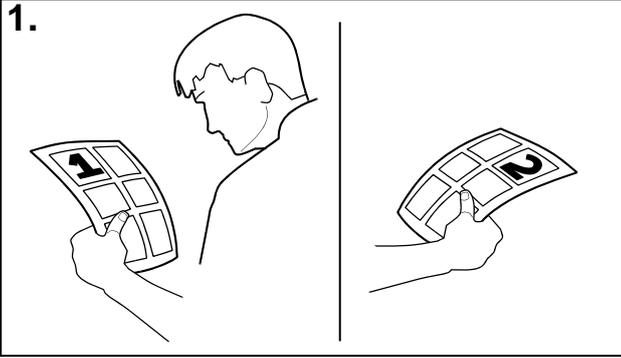

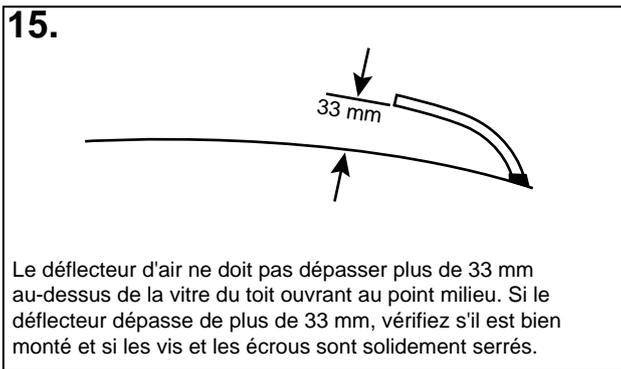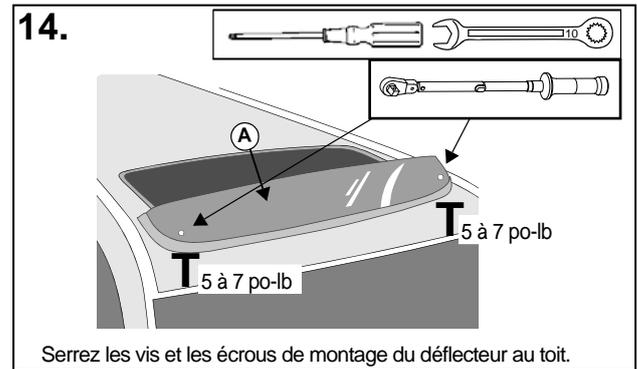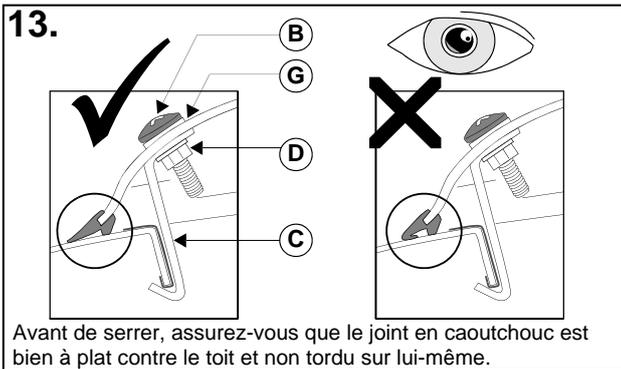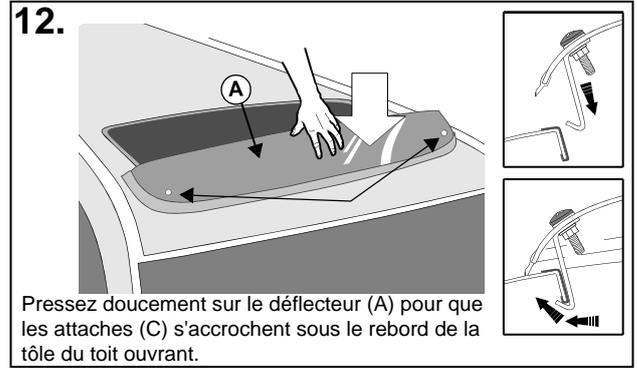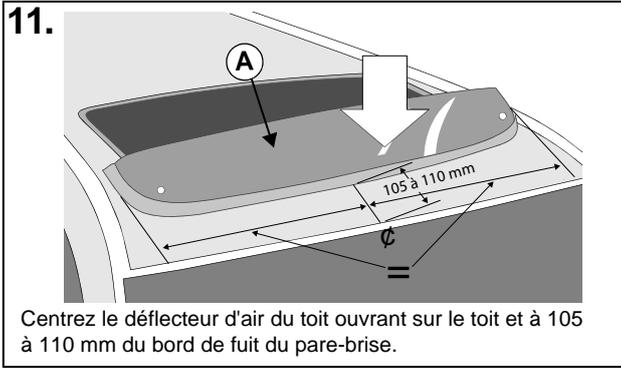

!
N'UTILISEZ PAS de nettoyant à solvant sur le déflecteur d'air du toit ouvrant. UTILISEZ uniquement du savon et de l'eau pour nettoyer le déflecteur d'air.

