
















INSTALLATION INSTRUCTIONS

DESCRIPTION: COMPARTMENT SEPARATOR

<p>A</p>  <p>1X</p>	<p>B</p>  <p>1X</p>	<p>C</p>  <p>1X</p>	<p>D</p>  <p>1X</p>	<p>E</p>  <p>1X</p>	<p>F</p>  <p>2X</p>	<p>G</p>  <p>4X</p>
<p>H</p>  <p>2X</p>	<p>I</p>  <p>2X</p>	<p>J</p>  <p>2X</p>	<p>K</p>  <p>4X</p>	<p>L</p>  <p>2X</p>	<p>M</p>  <p>2X</p>	<p>N</p>  <p>2X</p>

TOOLS REQUIRED




Meaning of Characters:




: Remove

T : Tightening Torque



: Install




: Loosen




: Disconnect




: Discard



: Connect



: Location of Clips or Screws




: Re-use

1


This product has been designed to allow for proper function of various vehicle safety components. The opening near the center of the separator is provided so that the shoulder strap belt for the rear center seat may be used without damaging the belt or compromising safety. In addition, spacing near the side windows on both sides of the separator are included in the design to allow for proper side curtain air bag clearances in the event of air bag deployment.

2

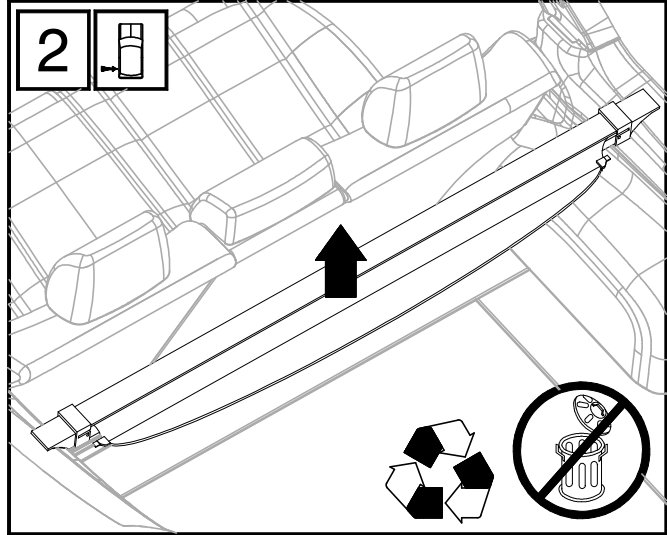


3


OPEN THE COVER TO THE CARGO HOOK ASSEMBLY AND REMOVE BOLT ON BOTH SIDES OF THE VEHICLE.

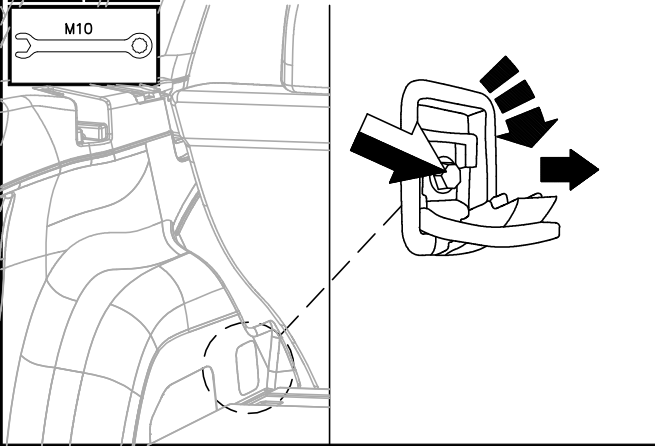


4






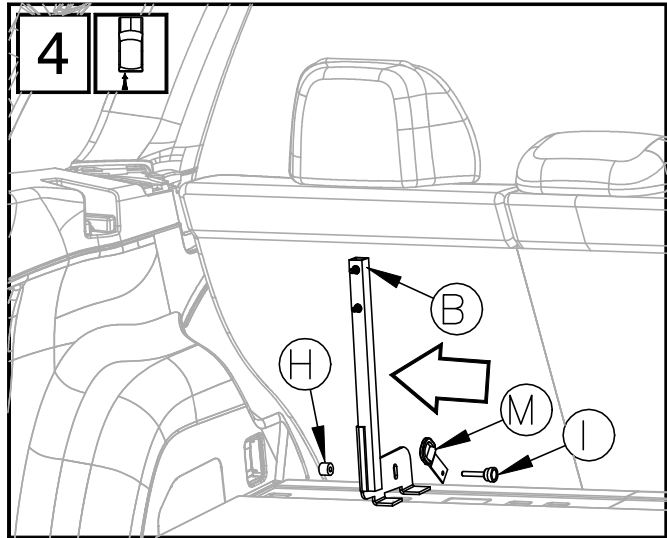


5

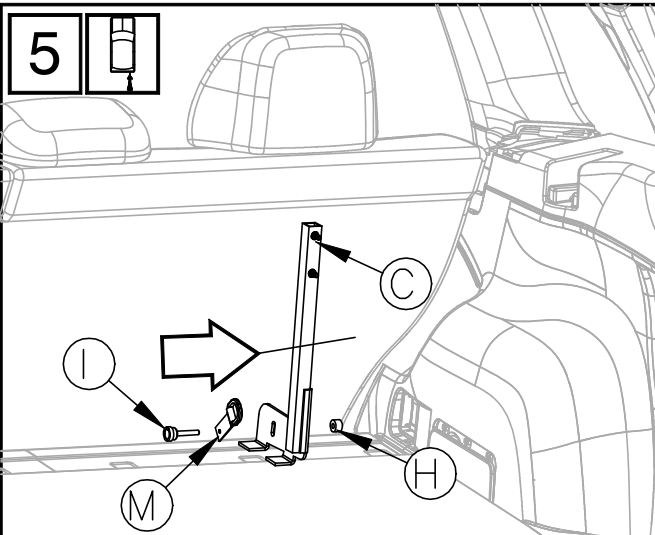

6

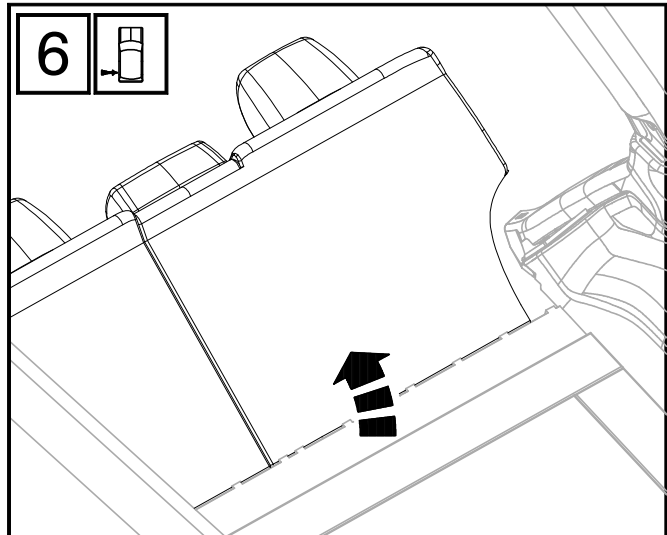


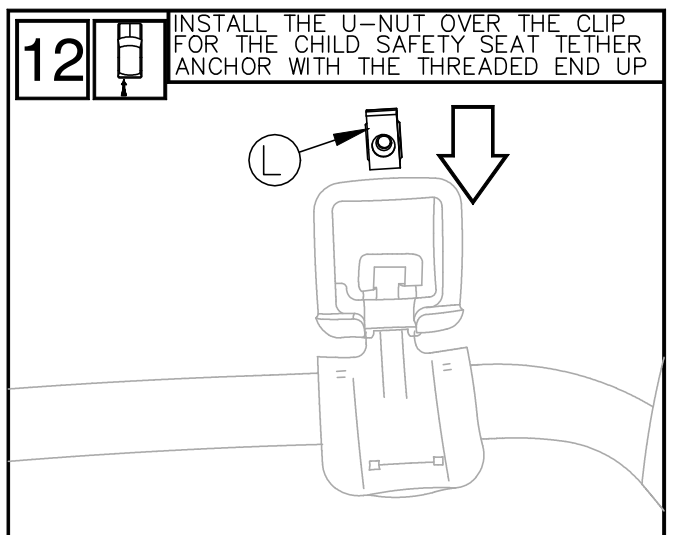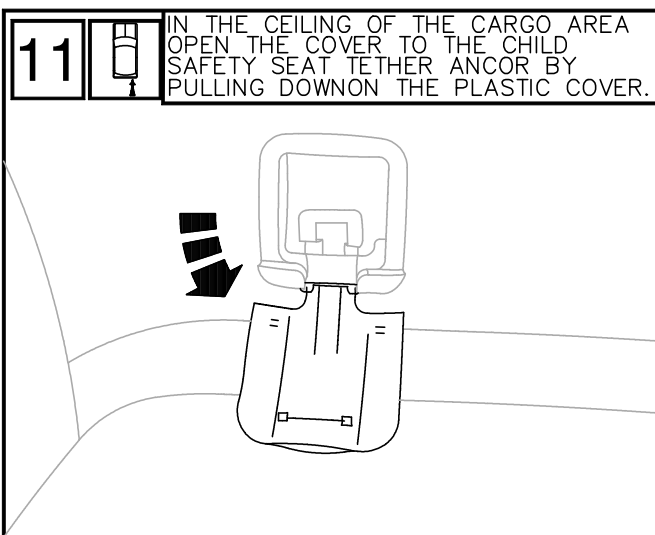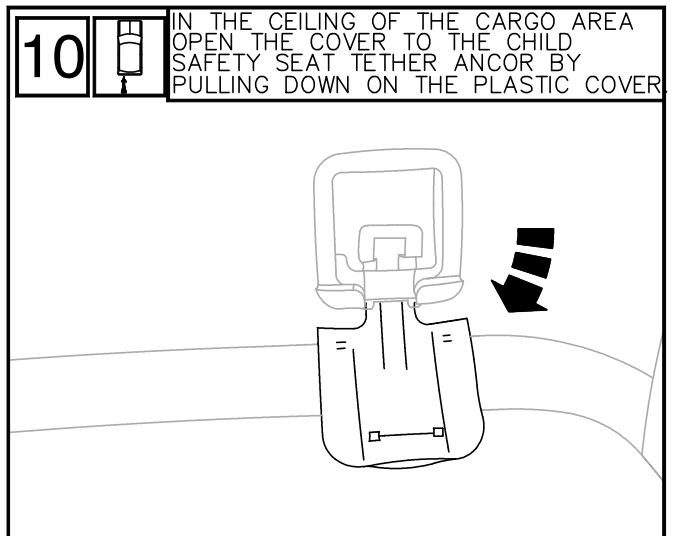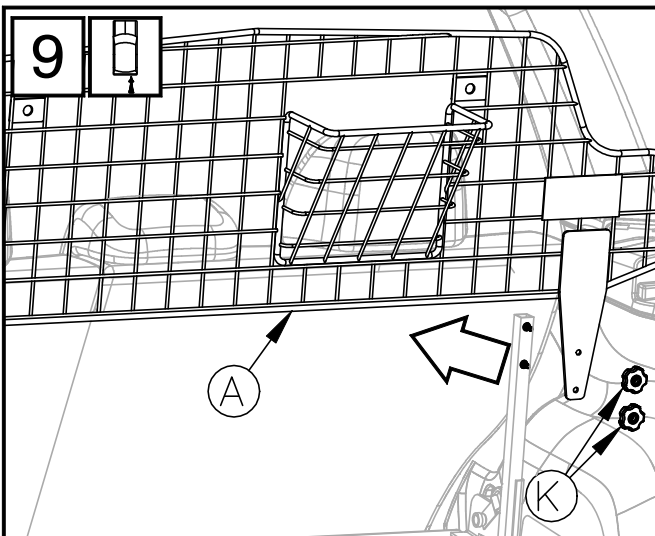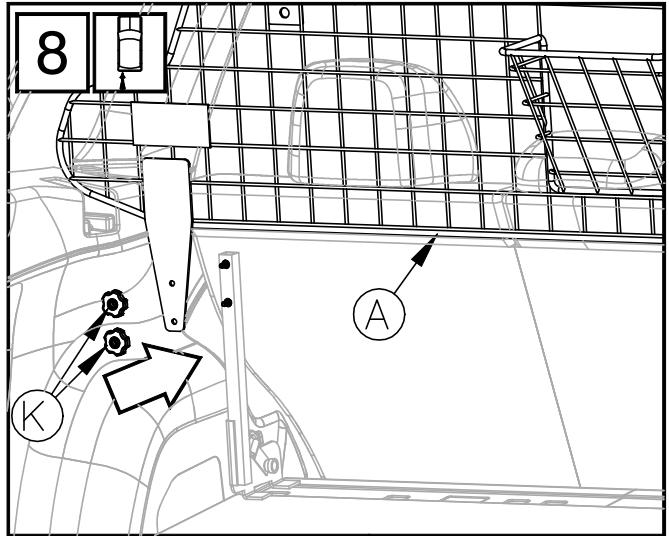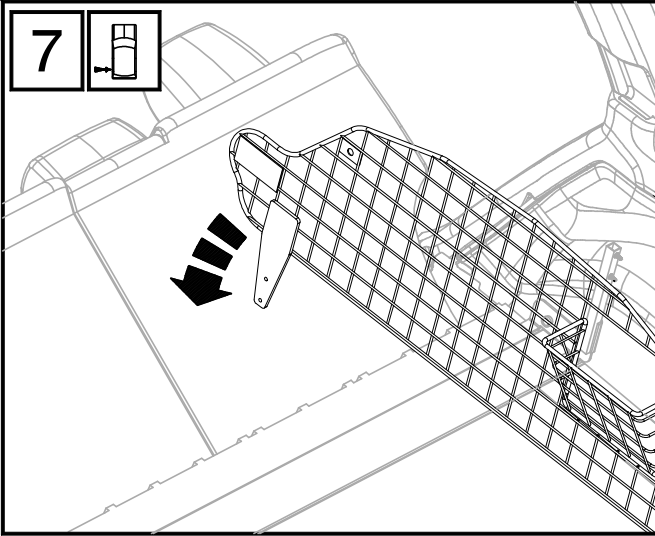


13



INSTALL THE U-NUT OVER THE CLIP FOR THE CHILD SAFETY SEAT TETHER ANCHOR WITH THE THREADED END UP


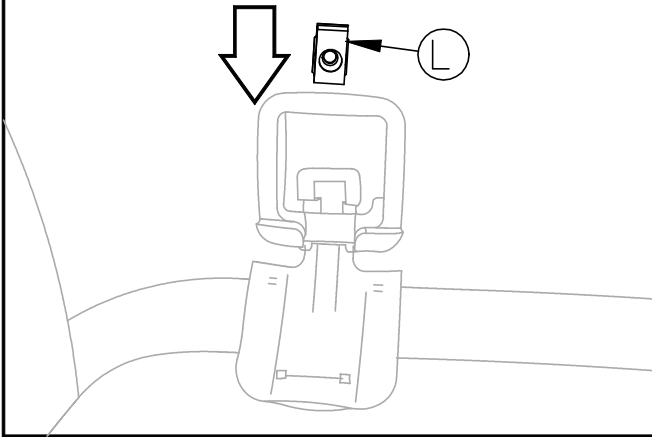


14


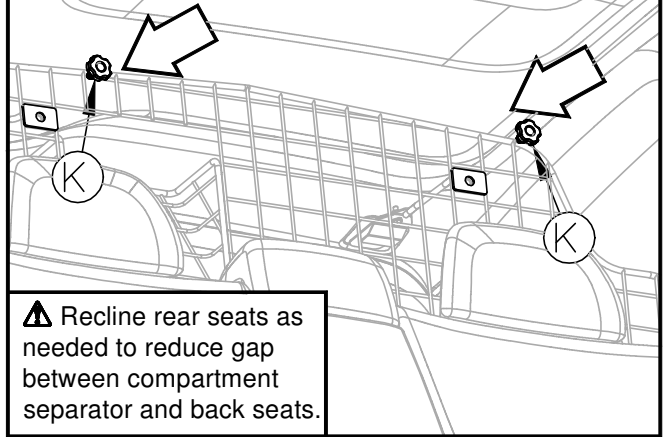


⚠ Recline rear seats as needed to reduce gap between compartment separator and back seats.



15

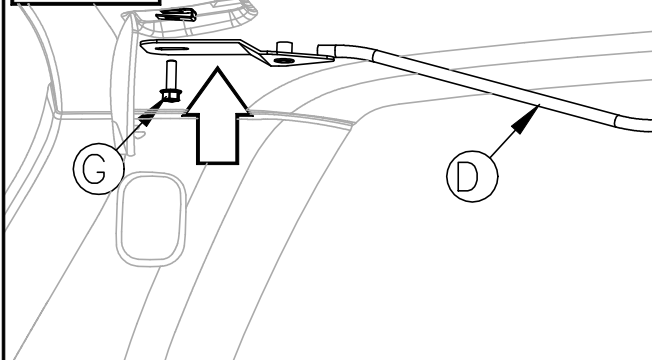

16

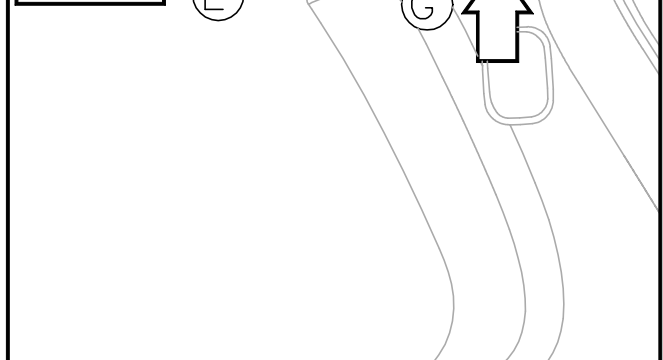


17

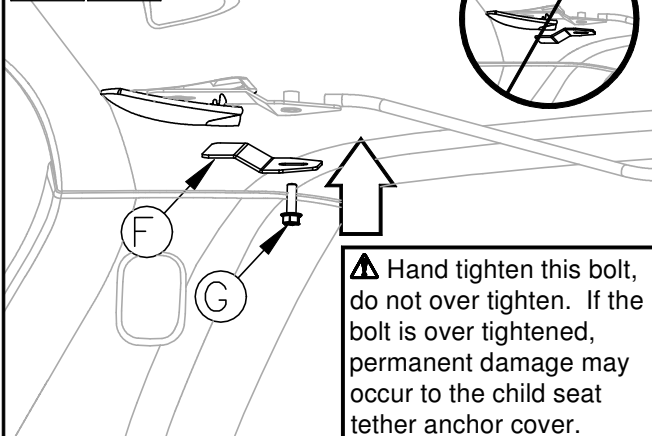

⚠ Hand tighten this bolt, do not over tighten. If the bolt is over tightened, permanent damage may occur to the child seat tether anchor cover.















18

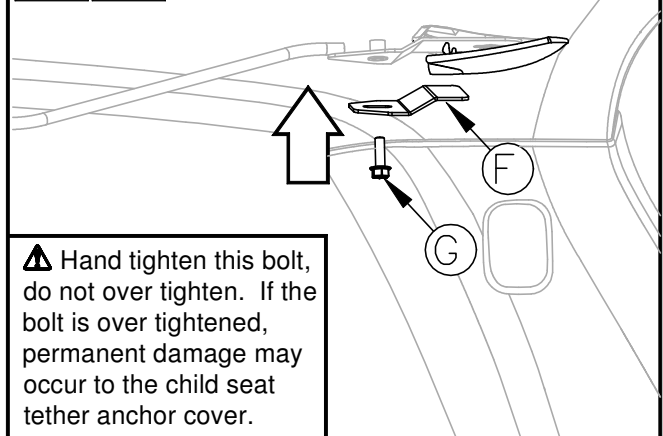


⚠ Hand tighten this bolt, do not over tighten. If the bolt is over tightened, permanent damage may occur to the child seat tether anchor cover.

DESCRIPTION: SÉPARATEUR DE COMPARTIMENT

DIRECTIVES D'INSTALLATION

<p>A</p>  <p>1X</p>	<p>B</p>  <p>1X</p>	<p>C</p>  <p>1X</p>	<p>D</p>  <p>1X</p>	<p>E</p>  <p>1X</p>	<p>F</p>  <p>2X</p>	<p>G</p>  <p>4X</p>
<p>H</p>  <p>2X</p>	<p>I</p>  <p>2X</p>	<p>J</p>  <p>2X</p>	<p>K</p>  <p>4X</p>	<p>L</p>  <p>2X</p>	<p>M</p>  <p>2X</p>	<p>N</p>  <p>2X</p>

OUTILS NECESSAIRES




Explication des symboles:




: Enlever

T : Couple de serrage



: Installer



: Desserrer



: Detacher



: Jeter



: Attacher



: Emplacement des attaches




: Reutiliser

1


Ce produit a été conçu pour permettre le bon fonctionnement de différentes pièces de sécurité dans les véhicules. Une ouverture se trouve près du centre du séparateur pour que la ceinture diagonale du siège central arrière puisse s'utiliser sans abîmer la ceinture et sans compromettre la sécurité. En plus, l'espacement près des vitres latérales des deux côtés du séparateur a été conçu pour laisser assez de place en cas de l'actionnement des coussins gonflables de sécurité.

2

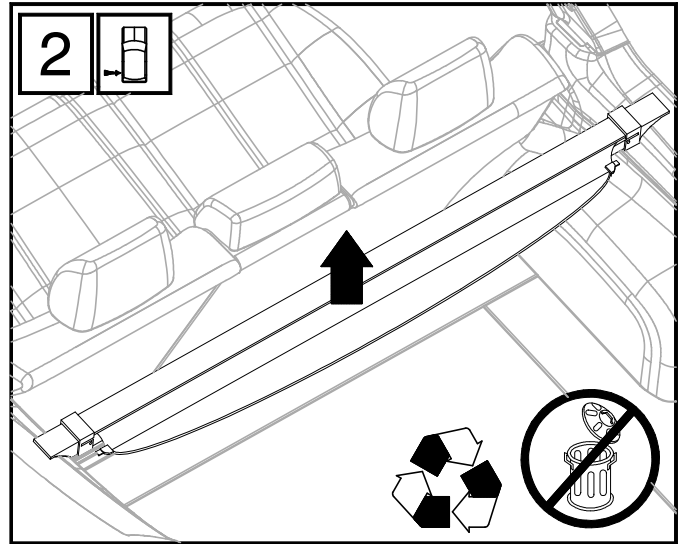


3


OUVRIR LA COUVERTURE DU CROCHET D'ASSEMBLAGE DE L'AIRE DE CHARGEMENT ET ENLEVER LE BOULON DES DEUX COTES DU VEHICULE.

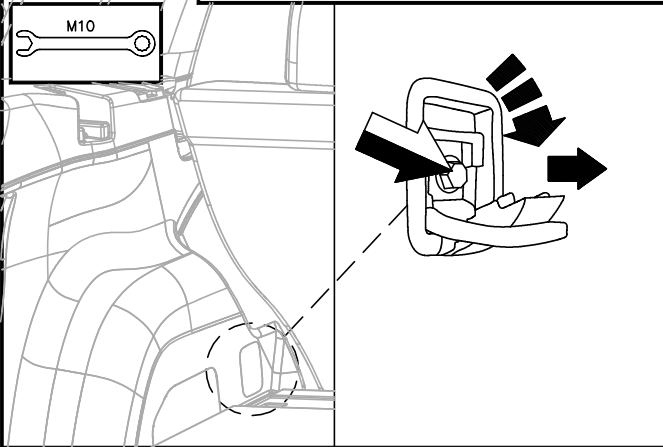


4






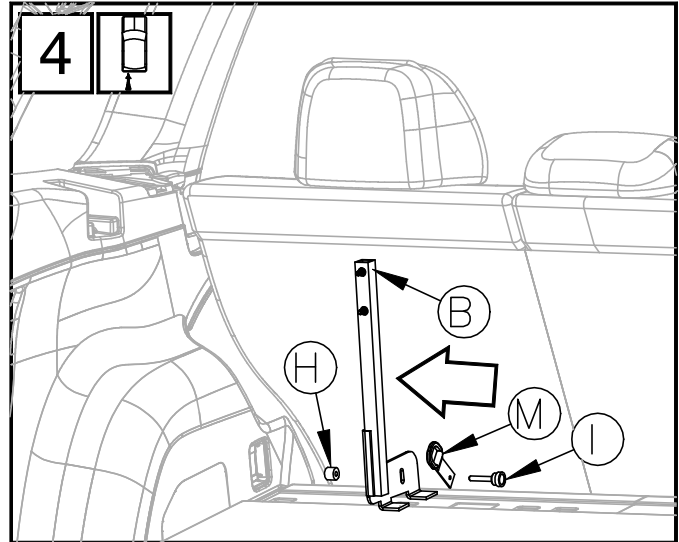


5

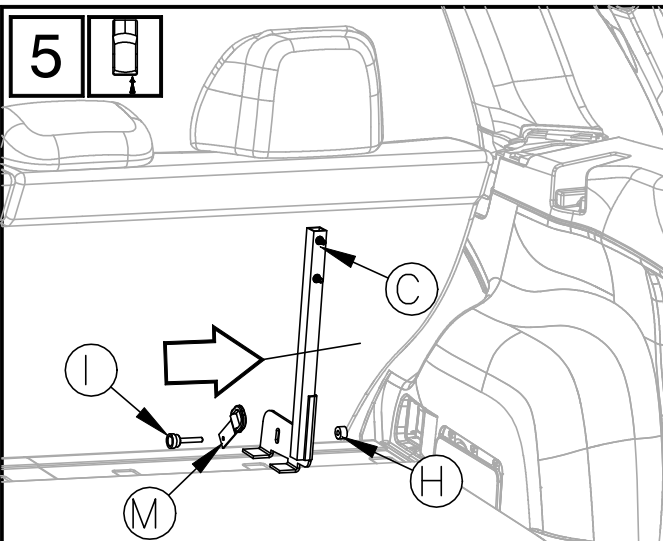


6

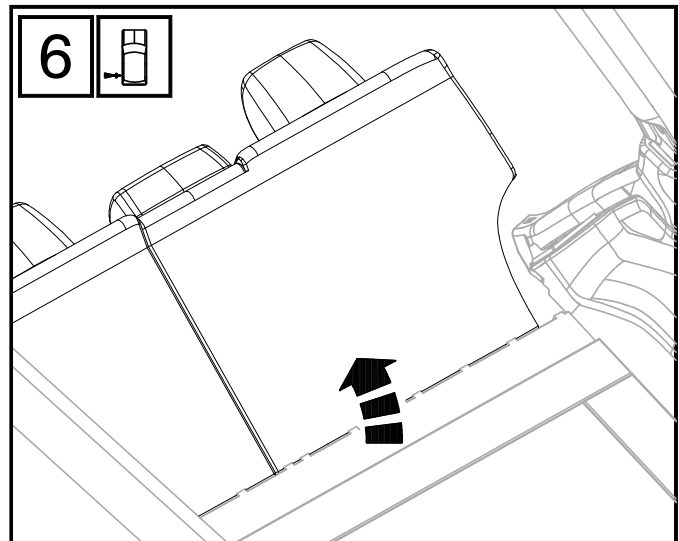

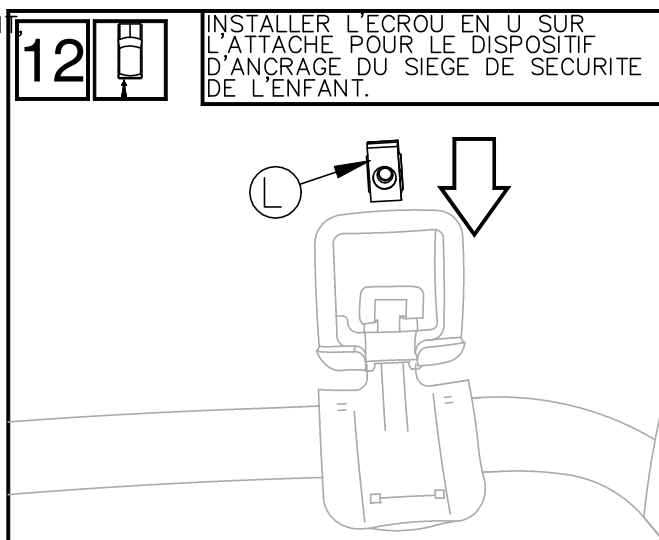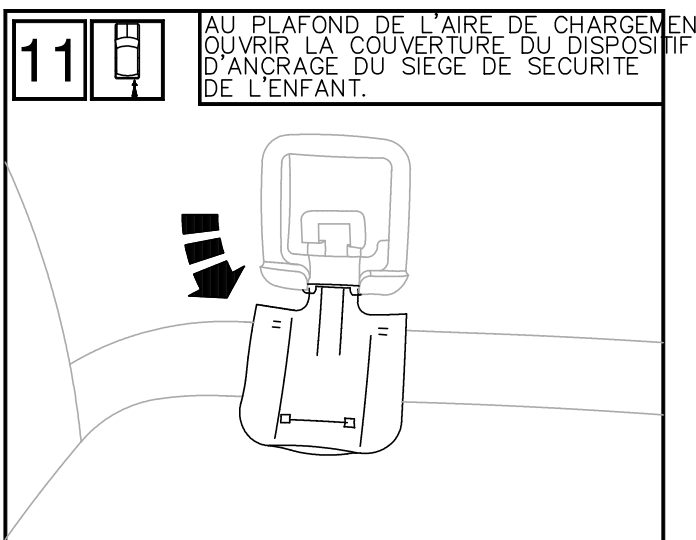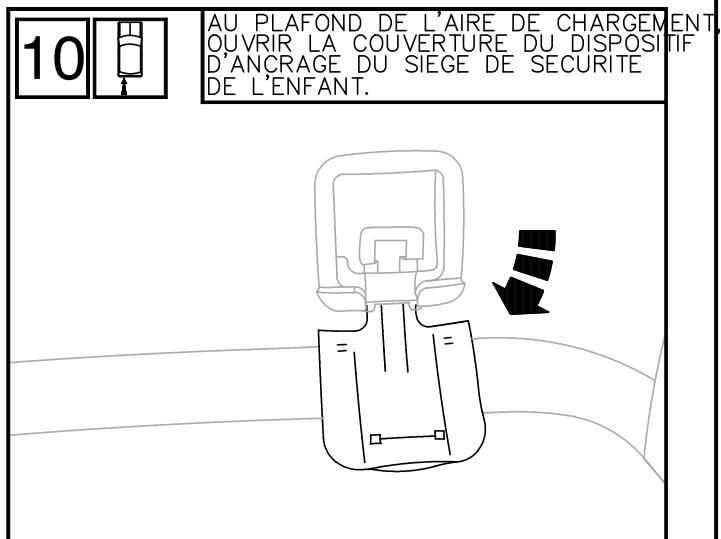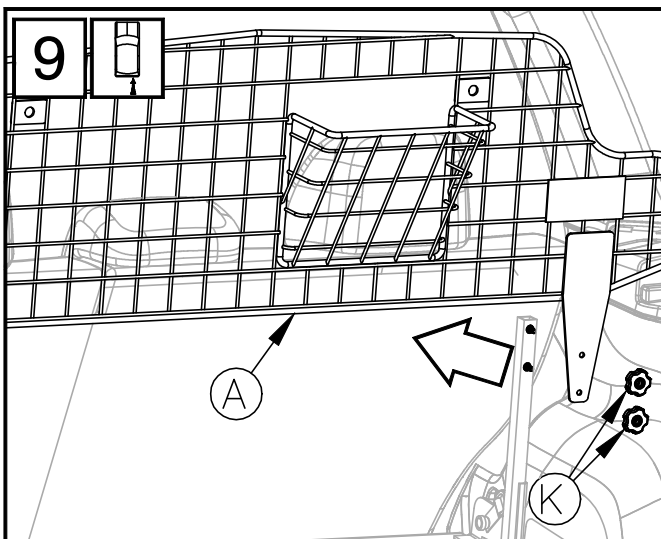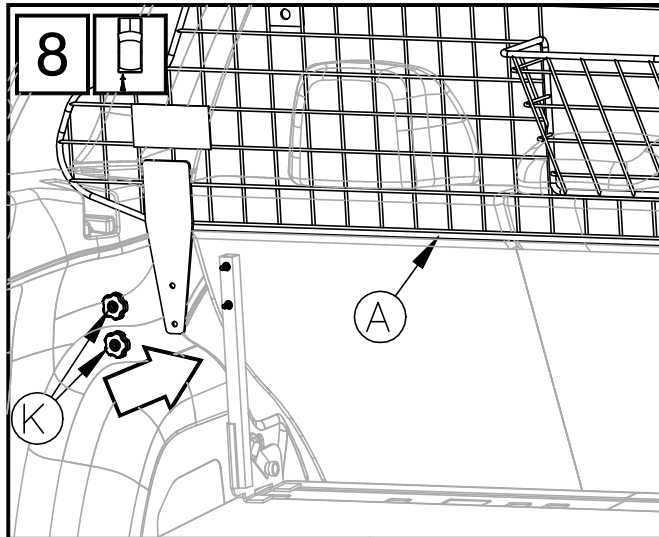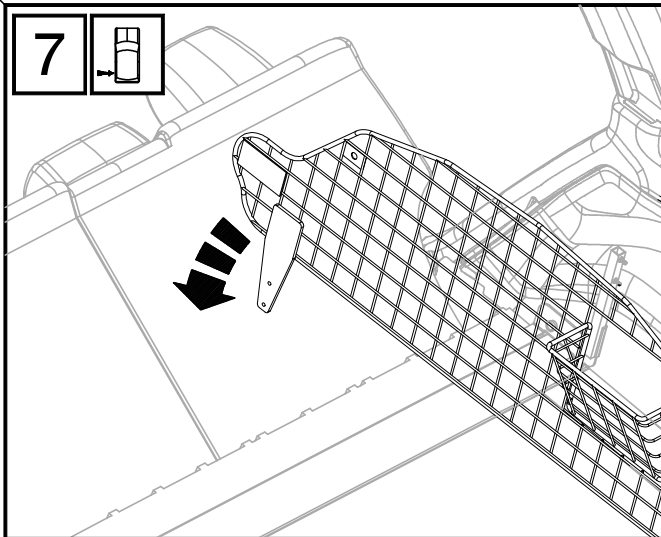


13 


INSTALLER L'ECROU EN U SUR L'ATTACHE POUR LE DISPOSITIF D'ANCRAGE DU SIEGE DE SECURITE DE L'ENFANT.

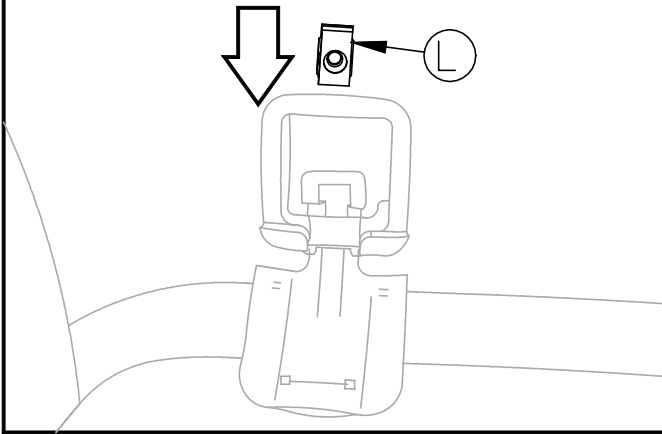


14 

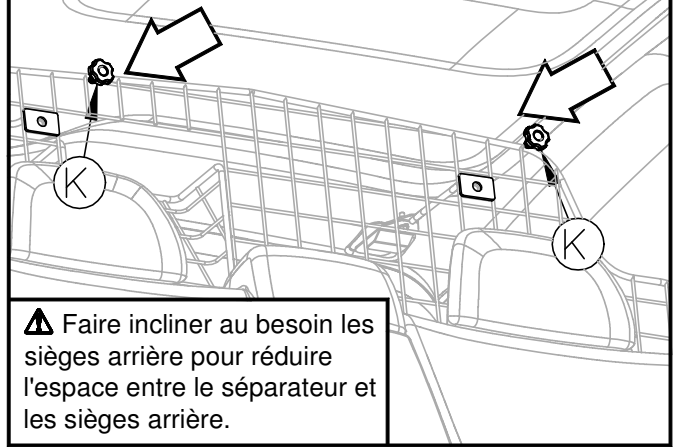



⚠ Faire incliner au besoin les sièges arrière pour réduire l'espace entre le séparateur et les sièges arrière.


15 

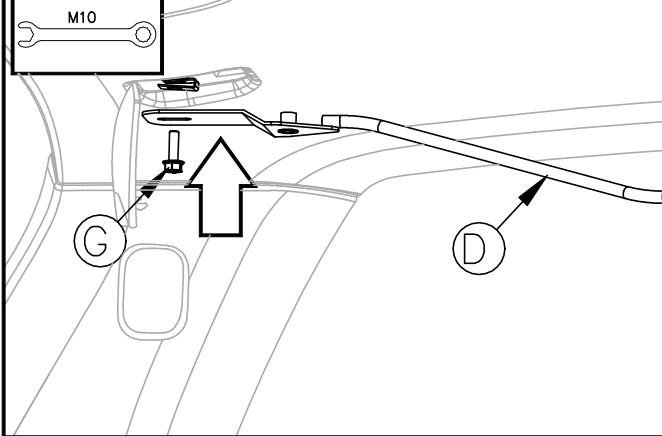

16 

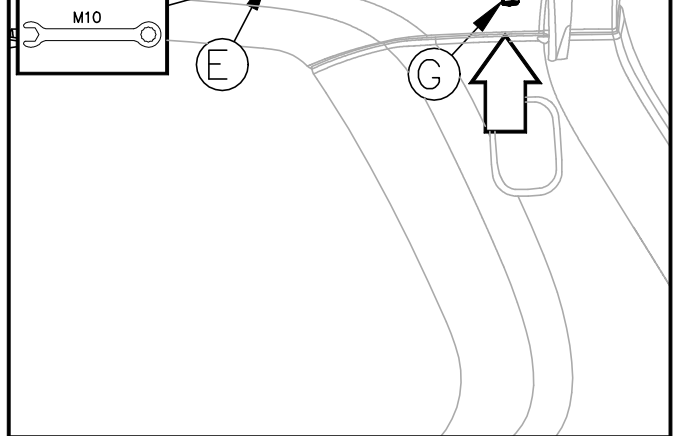


17 

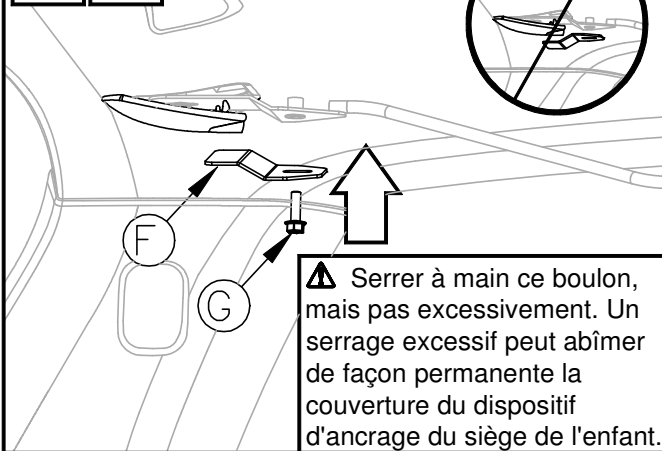

⚠ Serrer à main ce boulon, mais pas excessivement. Un serrage excessif peut abîmer de façon permanente la couverture du dispositif d'ancrage du siège de l'enfant.

18 

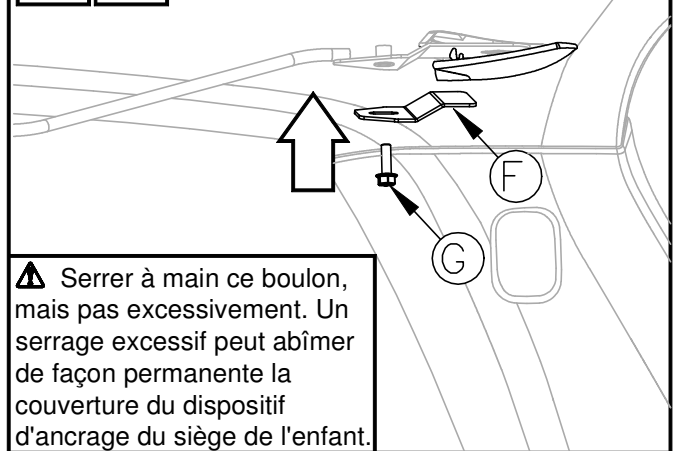

⚠ Serrer à main ce boulon, mais pas excessivement. Un serrage excessif peut abîmer de façon permanente la couverture du dispositif d'ancrage du siège de l'enfant.