

Volvo Car Corporation Gothenburg, Sweden

Instruction No Version Part. No.

31338932 1.1 31338929, 31338930, 31338931, 31373494, 31373493, 31373492, 31373462, 31408989, 31373768

Side scuff plate


© Volvo Car Corporation Side scuff plate- 31338932 - V1.1


Page 1 / 12



Volvo Car Corporation Gothenburg, Sweden

Materials	
Designation	Part number
Isopropanol	1161721

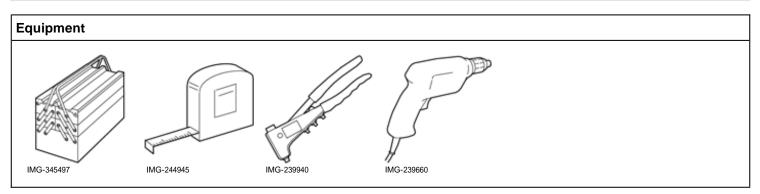



IMG-377501



Volvo Car Corporation Gothenburg, Sweden

Information

1

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.

Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

Conditions

2


When installing, the car must retain a temperature of 20 degrees ${\bf C}.$

After installation, the car must not be washed for 48 hours

After installation, the car must not be driven for 2 hours

Color symbols

3



IMG-363036

Note!

This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.


- Used for focused component, the component with which you will do something.
- Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6. Used as background color for vehicle components.


© Volvo Car Corporation Side scuff plate- 31338932 - V1.1



Volvo Car Corporation Gothenburg, Sweden

Applies to unpainted component

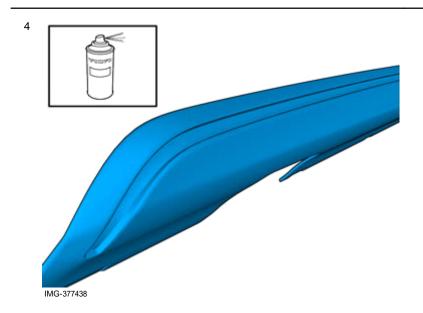

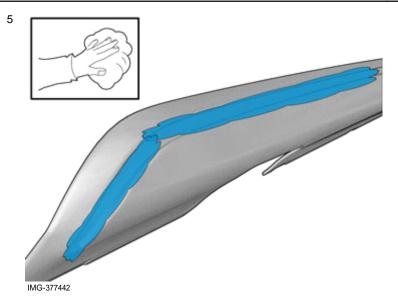

Caution!

First the paint must dry after painting.


Clean the surface.

Use: 1161721, Isopropanol



Volvo Car Corporation Gothenburg, Sweden

3




Remove the protective film.

IMG-377445

7

Install component that comes with the accessory kit.

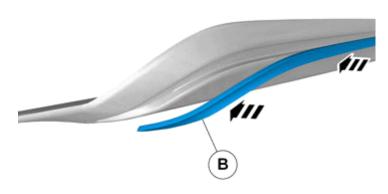

IMG-377446

All vehicles

Accessory installation




Volvo Car Corporation Gothenburg, Sweden

R

Clean the surface.


Allow to dry.

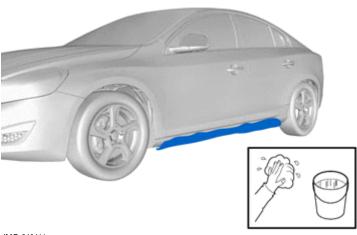

IMG-340411

9

Remove the protective film.



IMG-355879

10


Remove the protective film.




IMG-355880




Volvo Car Corporation Gothenburg, Sweden

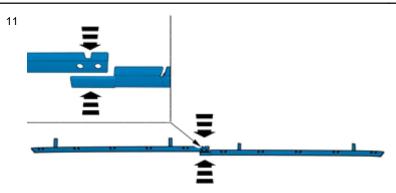

IMG-374598

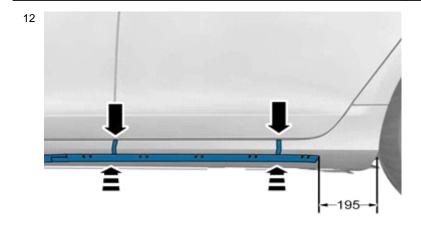

IMG-374452

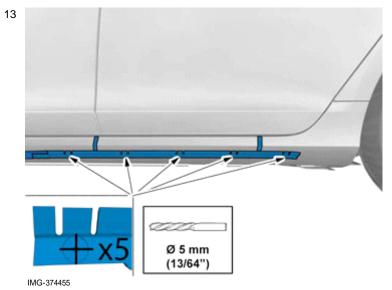



Drill the holes.

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

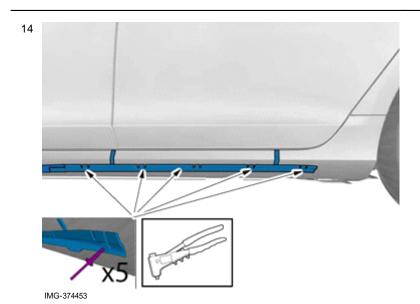

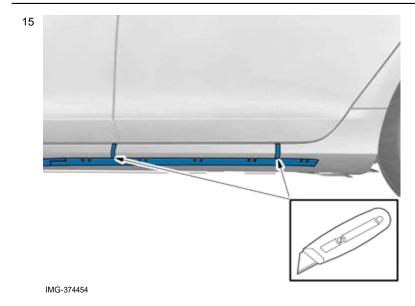




16


IMG-374456


Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

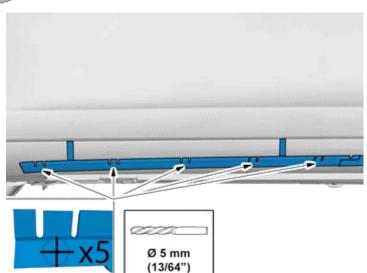

Drill the holes.

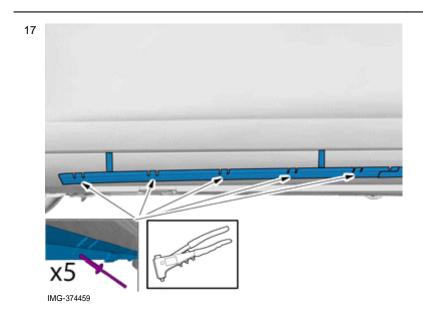


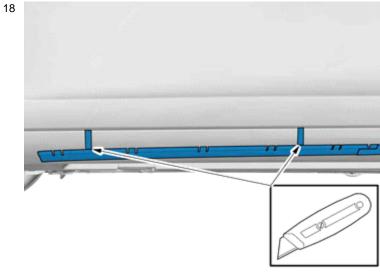

IMG-374457



Volvo Car Corporation Gothenburg, Sweden

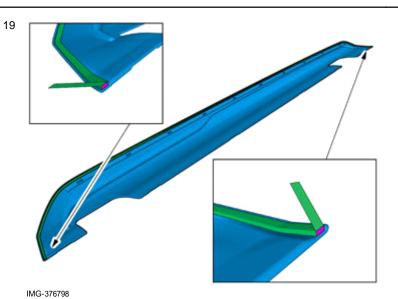


Fold the protective film forward



Clean the surface.

Use: 1161721, Isopropanol

IMG-376972

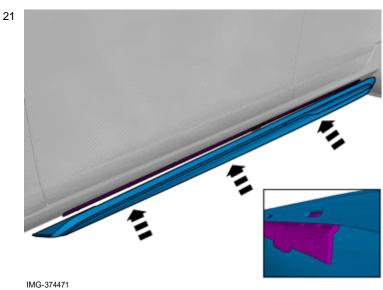


© Volvo Car Corporation

Side scuff plate- 31338932 - V1.1



Volvo Car Corporation Gothenburg, Sweden

22

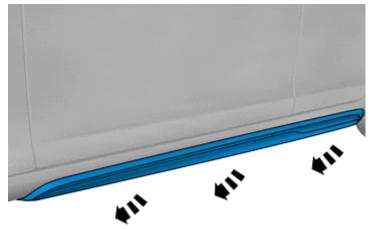

IMG-374473

23



IMG-374476

© Volvo Car Corporation



24

Installation instructions, accessories

Volvo Car Corporation Gothenburg, Sweden

Caution!

Pull carefully.

Remove the protective film.

Use: Interior trim remover

Hint

Press and apply pressure to the part over the tape for at least 20 seconds.

IMG-376811

25

Repeat all method steps for the other side.