

Volvo Car Corporation Gothenburg, Sweden


Instruction No Version Part. No.

31414797 1.0 31414791, 31414794, 31414793, 31414792, 39842094, 39842095, 39842096, 39842097


Steering wheel




Volvo Car Corporation Gothenburg, Sweden

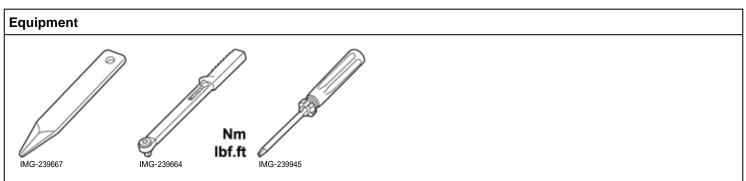









Volvo Car Corporation Gothenburg, Sweden

Information

1

Read through all of the instructions before starting installation.

Notifications and warning texts are for your safety and to minimise the risk of something breaking during installation.


Ensure that all tools stated in the instructions are available before starting installation.

Certain steps in the instructions are only presented in the form of images. Explanatory text is also given for more complicated steps.

In the event of any problems with the instructions or the accessory, contact your local Volvo dealer.

Color symbols

2



IMG-363036

Note!

This colour chart displays (in colour print and electronic version) the importance of the different colours used in the images of the method steps.

- 1. Used for focused component, the component with which you will do something.
- Used as extra colors when you need to show or differentiate additional parts.
- Used for attachments that are to be removed/installed. May be screws, clips, connectors, etc.
- 4. Used when the component is not fully removed from the vehicle but only hung to the side.
- 5. Used for standard tools and special tools.
- 6. Used as background color for vehicle components.

Removal




Volvo Car Corporation Gothenburg, Sweden


3



IMG-394535

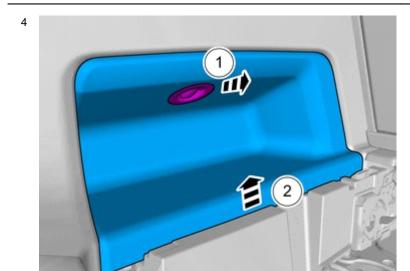

IMG-387004

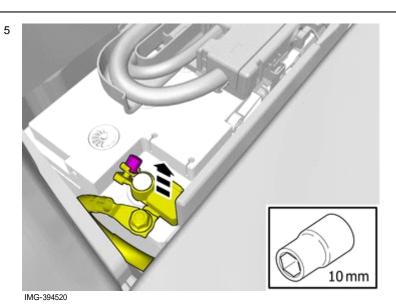

Remove the battery's negative cable.

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

6




7



Release the lock.



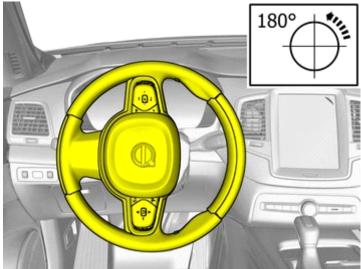


IMG-395232




Volvo Car Corporation Gothenburg, Sweden

9

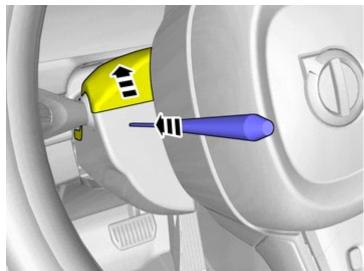

Release the lock.


IMG-395236

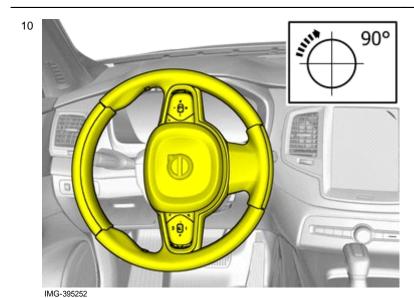



Volvo Car Corporation Gothenburg, Sweden


11

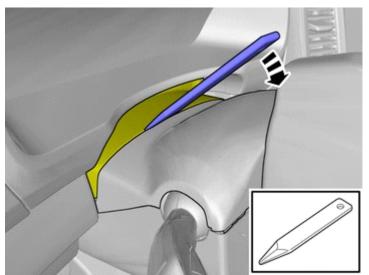

Detach the panel.

IMG-395250

12

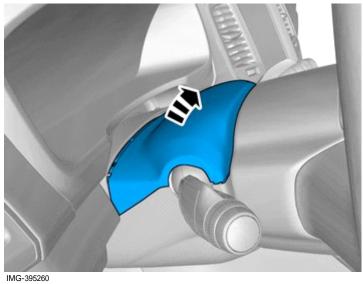

Remove the marked part.

13




IMG-395203



Volvo Car Corporation Gothenburg, Sweden


14

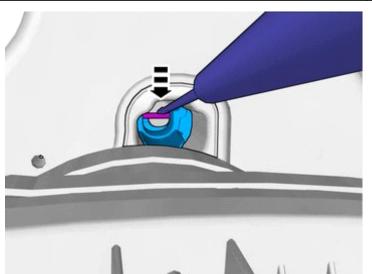


Release the lock.

IMG-395375



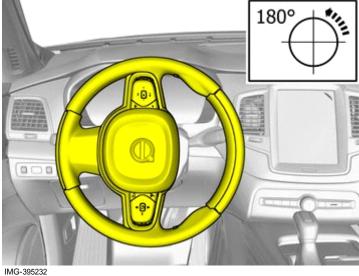

16

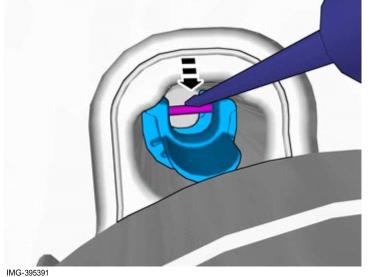

Release the lock.

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

17




Warning!

When temporarily storing a pyrotechnical component, it must always be positioned with its active part (e.g. air bag front or equivalent) facing up.

Remove the marked part.

18

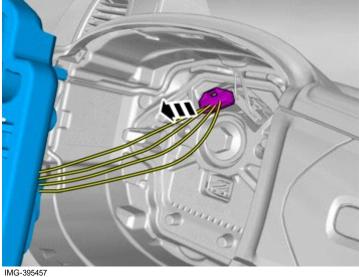


Disconnect the connector.

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

19

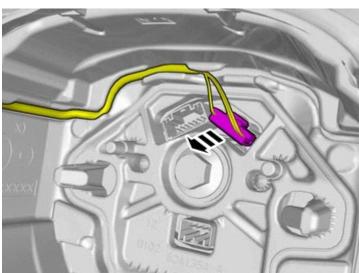

Disconnect the connector.


IMG-395470

20



Remove the screw.

21

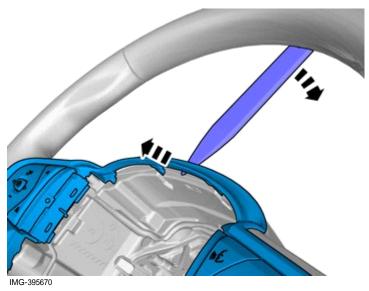


Use: Interior trim remover



Volvo Car Corporation Gothenburg, Sweden




Use: Interior trim remover






Use: Interior trim remover

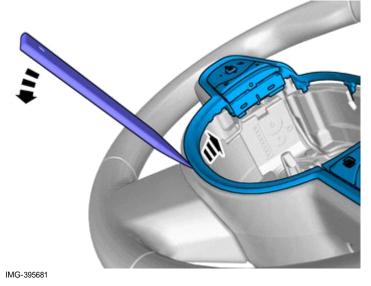

24

Use: Interior trim remover

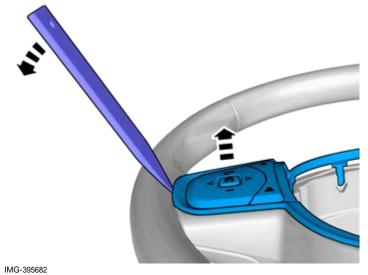

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

25

Remove the marked part.




IMG-395680

26

Remove the marked part.

Repeat on the other side.

The part is to be reused.

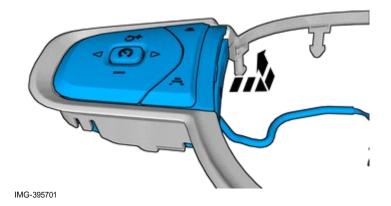

Accessory installation

© Volvo Car Corporation Steering wheel- 31414797 - V1.0

Page 12 / 17




Volvo Car Corporation Gothenburg, Sweden

27

Reuse existing parts.


Repeated on the right-hand side.

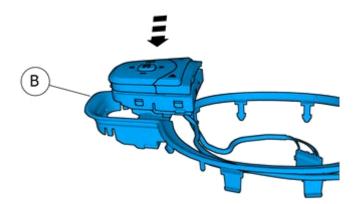

IMG-395805


28

Repeated on the right-hand side.

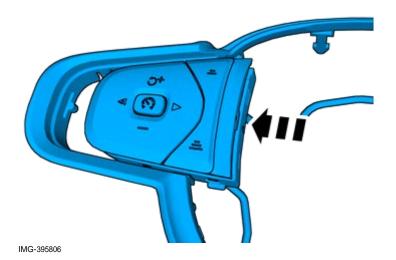

29


Install component that comes with the accessory kit.

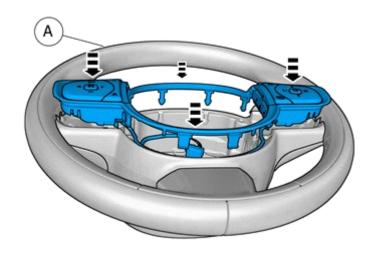


IMG-395811




Volvo Car Corporation Gothenburg, Sweden

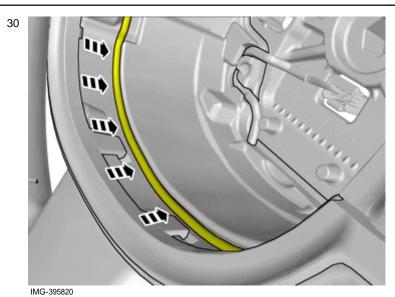

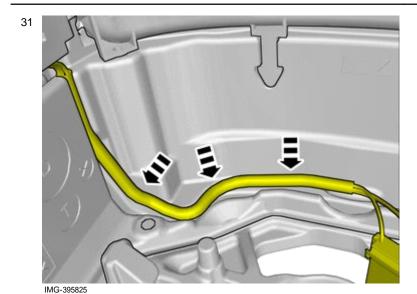



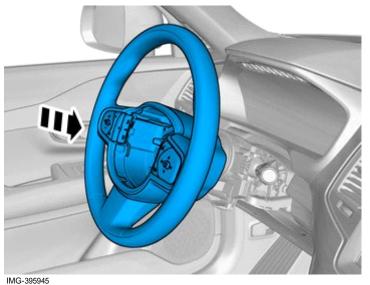


Install component that comes with the accessory kit.

© Volvo Car Corporation



Volvo Car Corporation Gothenburg, Sweden

33

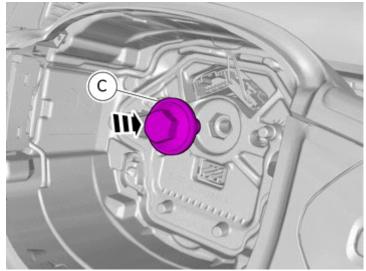


Install component that comes with the accessory kit.

Tighten the screw.

Tightening torque: Steering wheel to steering column (center screw), 60 Nm

IMG-396154

34

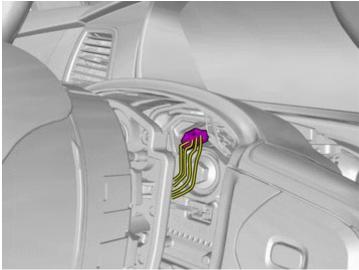


Connect the connector.

IMG-396035



Volvo Car Corporation Gothenburg, Sweden

35

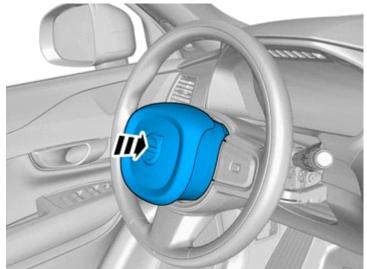

Reuse existing parts.

A click confirms that the component is in the correct position.

IMG-396040

IMG-394580

Installation

36

Reinstall the battery's negative cable.

Tightening torque: Battery cable for battery, 6 Nm


© Volvo Car Corporation Steering wheel- 31414797 - V1.0

10 mm



Volvo Car Corporation Gothenburg, Sweden



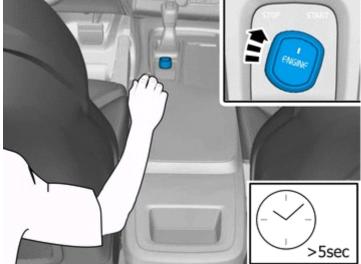

Warning!

The first time the vehicle is activated after the battery has been disconnected, this must be performed from the rear seat, avoid the work area for the air bags.

	Right-hand drive vehicles
38	When removing on right-hand drive cars, perform the procedures on the opposite side and/or mirrored.
39	When installing on right-hand drive cars, perform the procedures on the opposite side and/or mirrored.